


Combination Meter Removal/Installation

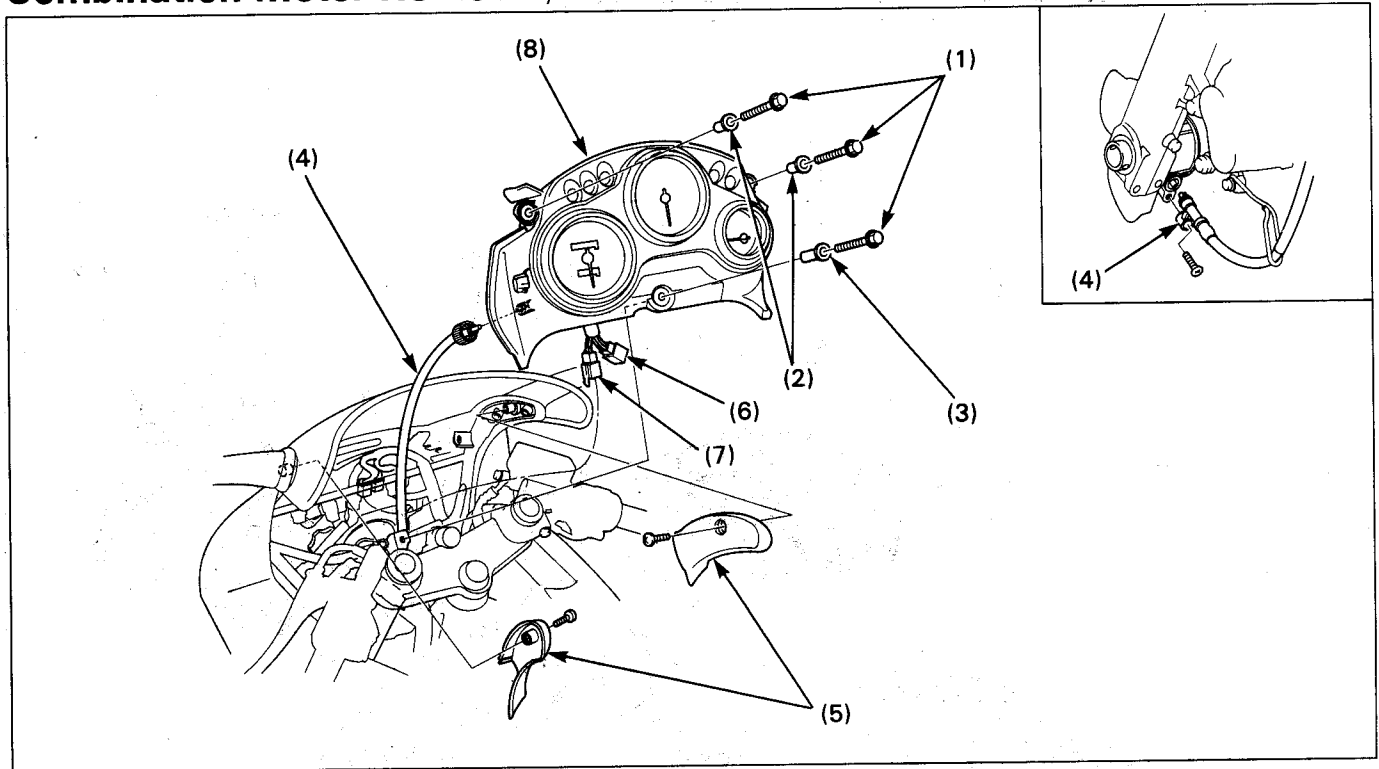

Requisite Service

- Wind screen removal/installation (page 2-4)

Procedure	Q'ty	Remarks
Removal Order		Installation is the reverse order of removal.
(1) Meter mounting bolt	3	
(2) Collar (short)	2	
(3) Collar (long)	1	
(4) Speedometer cable	1	Disconnect the speedometer cable at the speedometer gear box side, if necessary disconnect the cable from the meter after detaching the meter from the front cowl stay.
(5) Rear view mirror inner cover	2	
(6) 9P mini connector	1	
(7) 6P mini connector	1	
(8) Meter assembly	1	