

ATC SAFETY

Read these WARNING LABELS before you ride!

▼ IMPORTANT NOTICE

THIS VEHICLE IS DESIGNED AND MANUFACTURED FOR OFF-THE-ROAD USE ONLY. IT DOES NOT CONFORM TO FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND OPERATION ON PUBLIC STREETS, ROADS, OR HIGHWAYS IS ILLEGAL.



IMPORTANT INFORMATION

MODEL : ATC125M

- COLD TIRE PRESSURE : 2.2 psi (0.15 kg / cm²) ■ VEHICLE CAPACITY LOAD : 220lbs(100kg) ■ TIRE : OHTSU H-TRAK II 22×11-8 PRO/AM

DRIVE CHAIN CAUTION

- CHECK THE SLACK AND LUBRICATION BEFORE OPERATION
- CHAIN SLACK 10~20mm (0.4~0.8in)

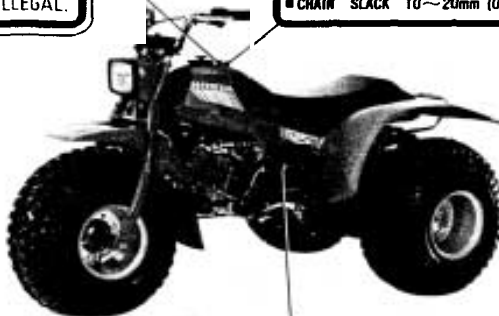

▲ WARNING

TO PREVENT SUDDEN MOVEMENT MAKE SURE NEUTRAL INDICATOR POINTS TO "N" BEFORE STARTING ENGINE.