

Starting Procedure

To restart a warm engine, follow the procedure for High Air Temperature.


Normal Air Temperature

15°–35°C (59°–95°F)

1. Raise the choke lever (6) to half position (B).
2. Open the throttle (5) slightly.
3. Pull the recoil starter (7) briskly.

NOTE:

* Since the engine decompression system is interlocked with the recoil starter, a quick, vigorous pull on the starter rope will be the most effective way to start.

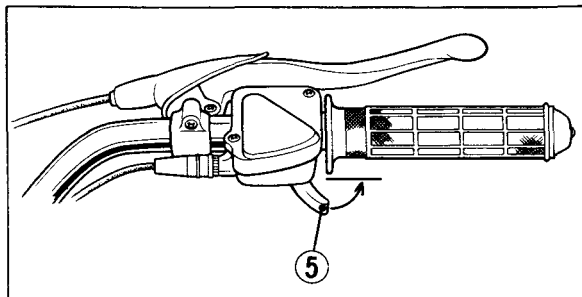

(5) Throttle lever

4. Immediately after the engine starts, push the choke lever down to the half position (B).
5. About a half minute after the engine starts, push the choke lever down all the way to Fully Open (C).
6. If idling is unstable, open the throttle slightly.

High Air Temperature

35°C (95°F) or above

1. Do not use the choke.
2. Open the throttle slightly.
3. Start the engine (See step 3 under Normal Air Temperature).



(6) Choke lever (B) Half position
(A) Fully Closed (C) Fully Open