

TIRE


The **ATC90** is equipped with 22×11 3.5, Ap. low pressure, tubeless tires. These tires are designed specifically for off-the-road use. Paved surfaces should be avoided, as they will cause excessive tire wear.

For normal use, the tires should be inflated to a maximum pressure of 2 psi. A manually operated tire pump should be used rather than the high pressure systems found in service stations. This will lessen the chance of inadvertently damaging the tires through overinflation.

Be especially careful to inflate both rear tires equally. If the **ATC 90** is operated with unequal tire pressures, the resultant difference in tire circumference will cause the **ATC 90** to tend to run toward one side and will affect handling adversely.

Recommended Pressure : 1.5 psi
(0.1 kg/cm²)

Max. Pressure : 2 psi
operatr only

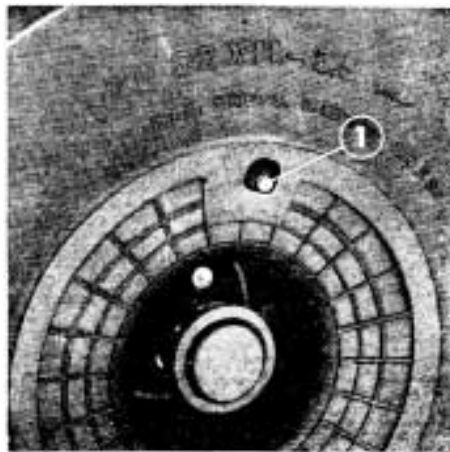

① Tire valve