


Throttle Cable Inspection

WARNING:

For safe operation and positive engine response, the throttle cable must be properly adjusted.

1. Check for smooth rotation of the throttle grip from the fully open to the fully closed positions. Check at full left and full right steering positions.
2. Inspect the condition of throttle cables from the throttle grip down to each of the carburetors. If the cables are kinked, chafed or improperly routed, they should be replaced and/or rerouted. Recheck cables for tension or stress at both full left and full right steering positions.

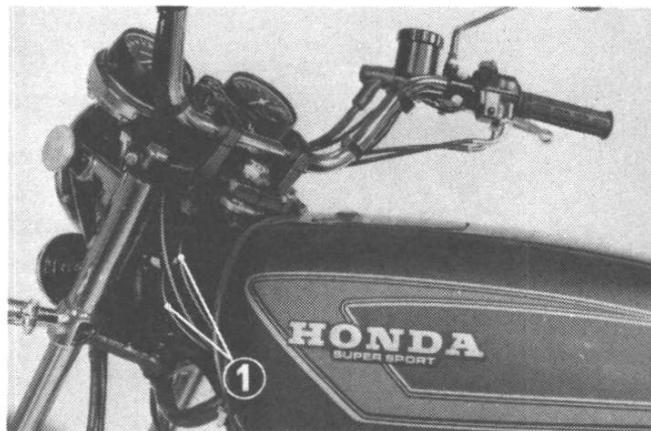

(1) Throttle cable