


## Headlight Beam Adjustment

The headlight must be properly adjusted for safe driving. This motorcycle have provisions to adjust the headlight in the vertical and horizontal directions.

1. The vertical adjustment is made by removing the side marker reflectors (1) and loosening the bolts (2) which mount the headlight assembly, then tilting the headlight as required.

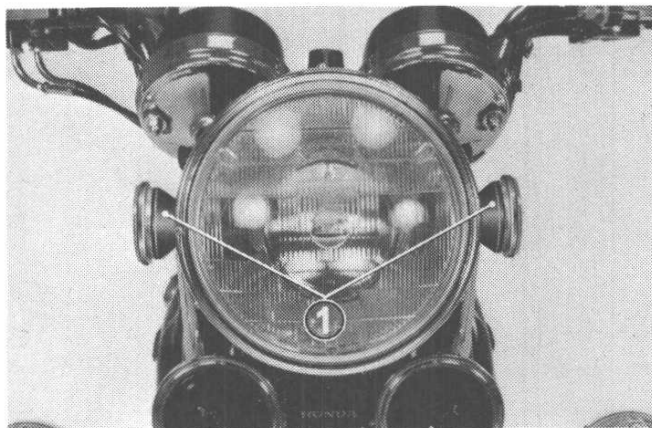


(1) Side marker reflectors

2. The horizontal beam adjustment is made with the adjusting screw (3) located on the left side of the headlight when facing the motorcycle. Turning the screw clockwise will focus the beam toward the left side of the rider and turning the screw counter-clockwise will focus the beam toward the right side.

### CAUTION:

Adjust the headlight beam as specified by local laws and regulations.

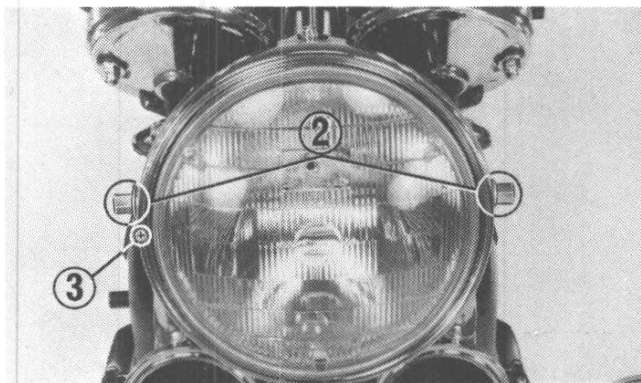

(2) Headlight mounting bolts  
(3) Beam adjusting screw