


■ FUEL AND OIL

● Fuel Tank

The fuel tank capacity is 17 liters (3.7 Imp. gal., 4.4 U.S. gallons) including the 5 liters (1.1 Imp. gal., 1.3 U.S.gallon) in the reserve supply.

Use low-lead or regular gasoline with a Research Octane number of 91 or higher or a Pump Octane number of 86 or higher.

NOTE: Pump Octane is the octane formula specified by the Cost of Living Council. When refueling take care to exclude dirt, water, or other contaminants from the fuel tank.

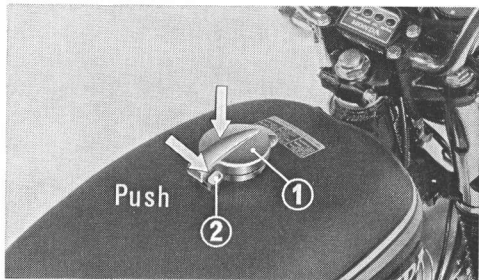

① Fuel filler cap

② Lock lever

WARNING:

1. Gasoline is extremely flammable and is explosive under certain conditions. Refuel in a well ventilated area with engine stopped. Do not smoke or allow open flames or sparks in the area where the motorcycle is refueled or where gasoline is stored.
2. Do not overfill the tank (there should be no fuel in the filler neck). After refueling, make sure the filler cap is closed securely.
3. Gasoline is harmful or fatal if swallowed. Avoid repeated or prolonged contact with skin or breathing of vapor. Keep out of reach of children. If gasoline is swallowed, do not induce vomiting. Call a physician immediately.

● Fuel Filler Cap

While pressing down the cap ①, depress the lock lever ② and the cap will be opened.