

5. Ignition switch

Disconnect the ignition switch wires and check for continuity between circuits. The switch is normal if continuity exists between the circuits as indicated by the mark "O-O" in the table shown immediately below:

	IG	KILL
OFF	○ — ○	○ — ○
RUN	○ — ○	○ — ○
OFF		
Cord color	Black	Black/white

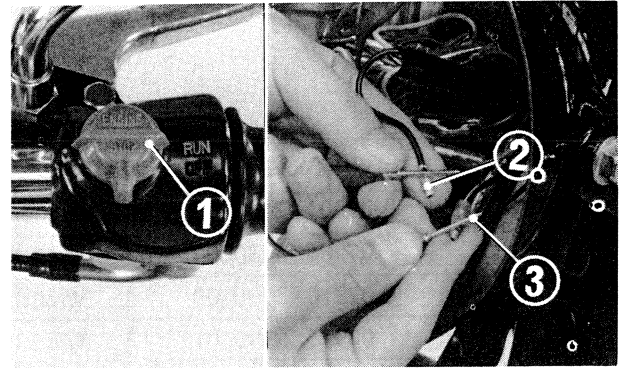


Fig. 45 (1) Kill switch
(2) Black/white

6. Horn switch

Disconnect the light green and green wires in the turn signal/dimmer switch and check for continuity between these two wires. The switch is correct if continuity exists when the switch button is depressed. Discard the old switch and install a new one if there is no continuity.

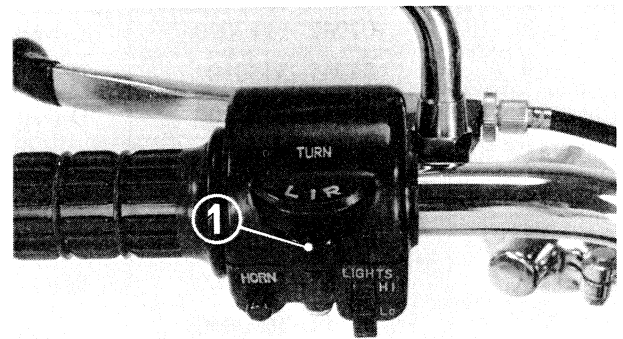


Fig. 46 (1) Horn switch