

INSTALLATION


Install the drive chain adjusters into the swingarm.
Place the rear wheel into the frame.

Insert the rear axle through the right drive chain adjuster, right side collar, rear wheel, left side collar and left chain adjuster.

Install the drive chain onto the driven sprocket.

Install the rear axle nut.

Adjust the drive chain slack (page 3-15).

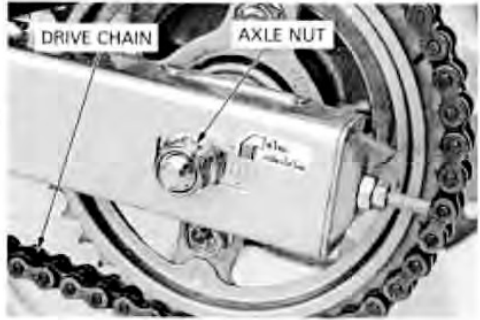

SHOCK ABSORBER

REMOVAL

Remove the rear cowl assembly (page 2-2).


Support the motorcycle securely using a hoist or equivalent.

Remove the shock absorber lower mounting bolt and nut.



Remove the shock absorber upper mounting bolt.

Remove the shock absorber.

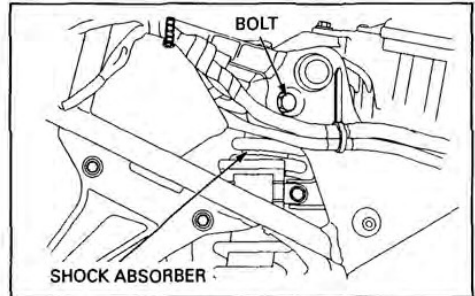

INSPECTION

Visually inspect the shock absorber for damage.
Check the following:

- Damper unit for deformation or oil leaks
- Upper and lower bushings for wear or damage

CAUTION:

- Do not disassemble the shock absorber.
- Replace the shock absorber if any component is damaged.

