


Front seat

To remove the front seat (1), remove the rear seat (page 47) and mounting bolts (2), and then pull the seat back and up.

To install the front seat, insert the tab (3) into the recess under the frame and tighten the mounting bolts securely.

Install the rear seat.

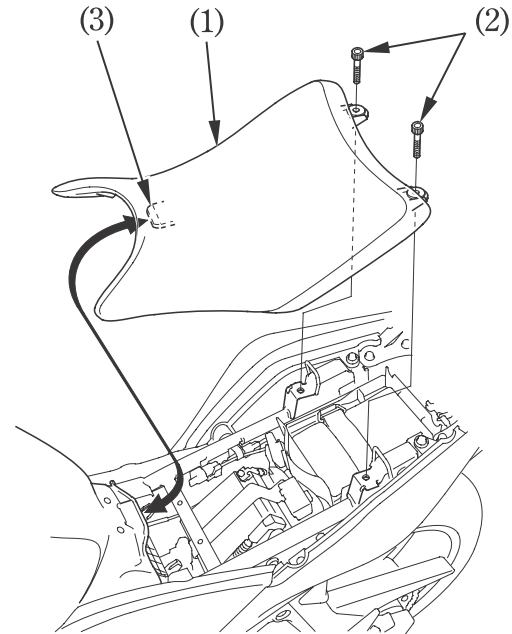

(1) Front seat
(2) Mounting bolts

(3) Tab