



Brake fluid must be added to the reservoir whenever the fluid level begins to reach the LOWER level mark (7). Remove the screws (1), reservoir cover (2), diaphragm plate (3), diaphragm (4), and float (5). Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the upper level mark (6). Reinstall the float, diaphragm, diaphragm plate, and cover. Tighten the screws securely.

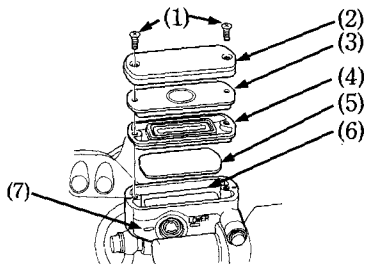

- | | |
|---------------------|----------------------|
| (1) Screws | (5) Float |
| (2) Reservoir cover | (6) Upper level mark |
| (3) Diaphragm plate | (7) LOWER level mark |
| (4) Diaphragm | |

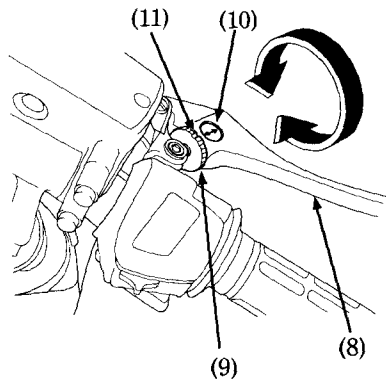

- | | |
|-----------------------|-----------------|
| (8) Front brake lever | (10) Arrow |
| (9) Adjuster | (11) Index mark |