



### Italian only

1. Remove the socket (1) by pulling it upward.
2. Slightly press down on the bulb (2) and turn it counterclockwise.
3. Install a new bulb (2).
4. Align the tab (3) of the socket with the hole in the headlight case (4) and press the socket into place on the headlight case securely.

#### NOTE:

- \* Do not use bulbs other than that specified.
- \* After installing a new bulb, check that the light operates properly.

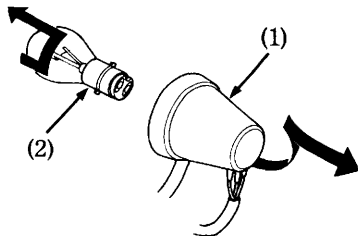

(1) Socket  
(3) Tab

(2) Bulb  
(4) Headlight case