



5. Pour the recommended fork oil into the outer tube (1).

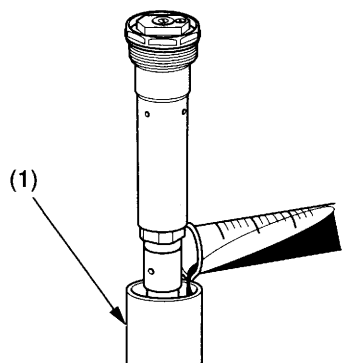

(1) outer tube


## Fork Oil Capacity (ED, U, CM, IICM type):

### Standard 0.46 kgf/mm (25.76 lbf/in) Fork Spring

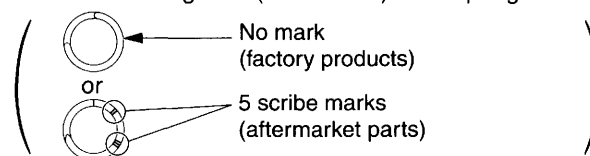


Standard oil capacity	408 cm <sup>3</sup> (13.8 US oz, 14.4 Imp oz)	
Maximum oil capacity	416 cm <sup>3</sup> (14.1 US oz, 14.6 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	320 cm <sup>3</sup> (10.8 US oz, 11.3 Imp oz)	Slightly softer as it nears full compression.

### Optional Softer 0.44 kgf/mm (24.64 lbf/in) Fork Spring

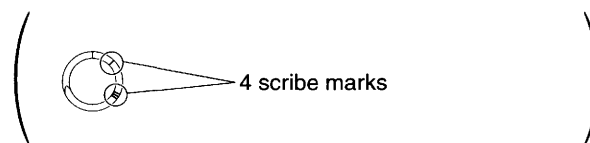

Standard oil capacity	413 cm <sup>3</sup> (14.0 US oz, 14.5 Imp oz)	
Maximum oil capacity	421 cm <sup>3</sup> (14.2 US oz, 14.8 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	325 cm <sup>3</sup> (11.0 US oz, 11.4 Imp oz)	Slightly softer as it nears full compression.

### Optional Stiffer 0.48 kgf/mm (26.88 lbf/in) Fork Spring

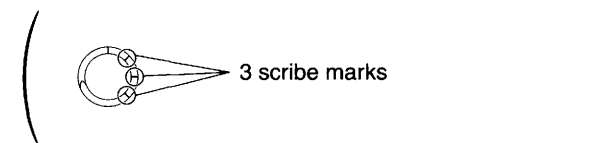

Standard oil capacity	402 cm <sup>3</sup> (13.6 US oz, 14.2 Imp oz)	
Maximum oil capacity	410 cm <sup>3</sup> (13.9 US oz, 14.4 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	314 cm <sup>3</sup> (10.6 US oz, 11.1 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.

(cont'd)