


Suspension


Fork Oil Capacity (DE type):

Standard 0.46 kgf/mm (25.76 lbf/in) Fork Spring

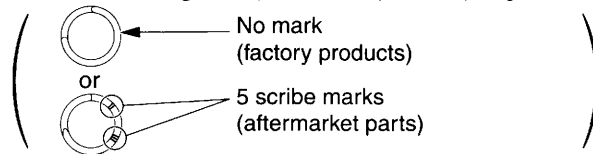


Standard oil capacity	400 cm ³ (13.5 US oz, 14.1 Imp oz)	
Maximum oil capacity	419 cm ³ (14.2 US oz, 14.7 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	323 cm ³ (10.9 US oz, 11.4 Imp oz)	Slightly softer as it nears full compression.

Optional Softer 0.44 kgf/mm (24.64 lbf/in) Fork Spring

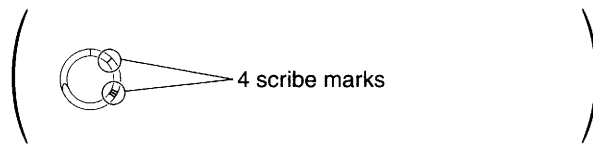

Standard oil capacity	405 cm ³ (13.7 US oz, 14.3 Imp oz)	
Maximum oil capacity	424 cm ³ (14.3 US oz, 14.9 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	328 cm ³ (11.1 US oz, 11.5 Imp oz)	Slightly softer as it nears full compression.


Optional Stiffer 0.48 kgf/mm (26.88 lbf/in) Fork Spring

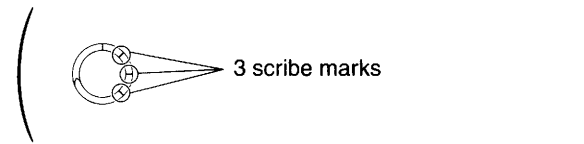

Standard oil capacity	394 cm ³ (13.3 US oz, 13.9 Imp oz)	
Maximum oil capacity	413 cm ³ (14.0 US oz, 14.5 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	317 cm ³ (10.7 US oz, 11.2 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.

- Check that the O-ring (10) on the fork damper (2) is in good condition. Apply the recommended fork oil to the O-ring.

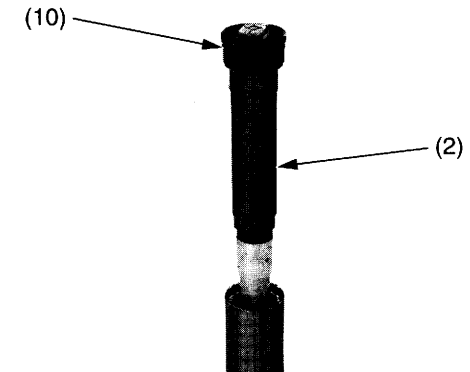

(2) fork damper
(10) O-ring

- Temporarily install the fork damper to the outer tube.
After installing the fork leg (page 109) tighten the fork damper to the specified torque:
Actual:
34 N·m (3.5 kgf·m, 25 lbf·ft)
Torque wrench scale reading:
31 N·m (3.2 kgf·m, 23 lbf·ft) using a 500 mm (20 in) long torque wrench.

When using the lock nut wrench, use a 500 mm (20 in) long deflecting beam type torque wrench. The lock nut wrench increases the torque wrench's leverage, so the torque wrench reading will be less than the torque actually applied to the fork damper.