


Torque Specifications

Frame

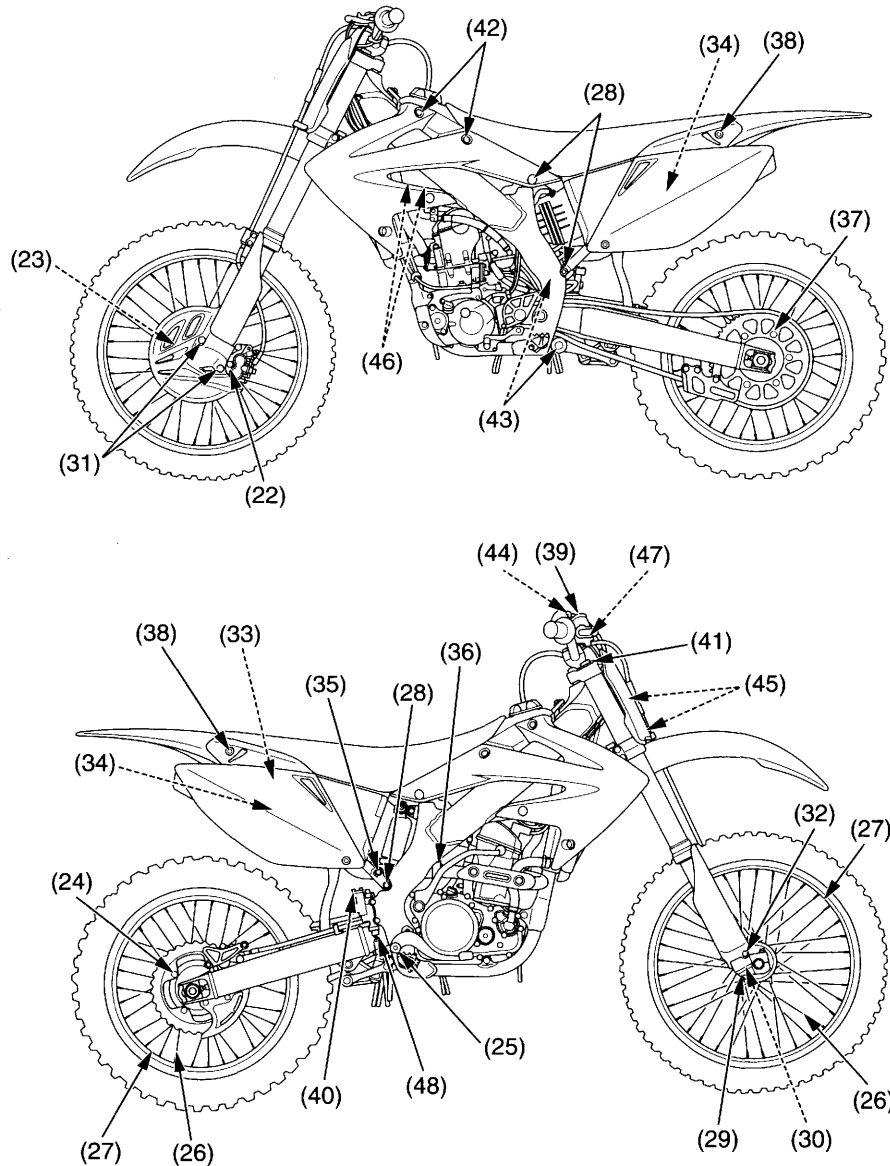

Item	Torque			Remarks	
	N•m	kgf•m	lbf•ft		
FRAME					
22	Caliper mounting bolts	30	3.1	22	NOTE 4
23	Front brake disc nuts	16	1.6	12	NOTE 1
24	Rear brake disc nuts	16	1.6	12	NOTE 1
25	Brake pedal pivot bolt	36	3.7	27	NOTE 5
26	Spoke	(front)	3.68	0.4	2.7
		(rear)	3.7	0.4	2.7
27	Rim locks	12	1.2	9	
28	Subframe mounting bolts	(upper)	30	3.1	22
		(lower)	49	5.0	36
29	Fork centre bolt	69	7.0	51	
30	Fork centre lock nut	22	2.2	16	
31	Disc cover bolts	13	1.3	10	
32	Fork protector bolts	7	0.7	5.2	NOTE 4
33	Muffler mounting bolts	(right/left)	26	2.7	19
34	Muffler clamp bolt	(right/left)	21	2.1	15
35	Exhaust joint pipe mounting bolt		26	2.7	19
36	Exhaust joint pipe clamp bolt		21	2.1	15
37	Driven sprocket nuts	32	3.3	24	NOTE 1
38	Seat mounting bolts	26	2.7	19	
39	Front brake reservoir cap screws	1.0	0.1	0.7	
40	Rear brake reservoir cap bolts	1.0	0.1	0.7	
41	Fork air pressure release screw	1.2	0.1	0.9	
42	Shroud B bolts	5	0.5	3.7	
43	Drive chain roller bolt/nut	12	1.2	9	
44	Throttle cable lock nut	4	0.4	3.0	
45	Steering damper mounting bolts		20	2.0	15
46	Fuel joint mounting bolt	10	1.0	7	
47	Brake lever adjuster lock nut	5.9	0.6	4.4	
48	Brake pedal adjuster lock nut	5.9	0.6	4.4	

- NOTES: 1. U-nut.
 2. UBS nut.
 3. Apply oil to the threads and flange surface.
 4. Alock bolt.
 5. Apply locking agent to the threads.