


Cooling System Inspection

1. Check the cooling system for leaks (see the Honda Service Manual for troubleshooting of leaks).
2. Check the water hoses (1) for cracks, deterioration, and radiator hose clamp for looseness.
3. Check the radiator mount for looseness.
4. Make sure the siphon hose (2) is connected and not clogged.
5. Check the radiator fins for clogging.
6. Check the bleed hole (3) below the water pump cover (4) for leakage. Check for signs of seal leakage. A small amount of “weeping” from the bleed hole is normal. See the Honda Service Manual or consult your Honda dealer for replacing the water seal or the oil seal. Both seals should be replaced at the same time.

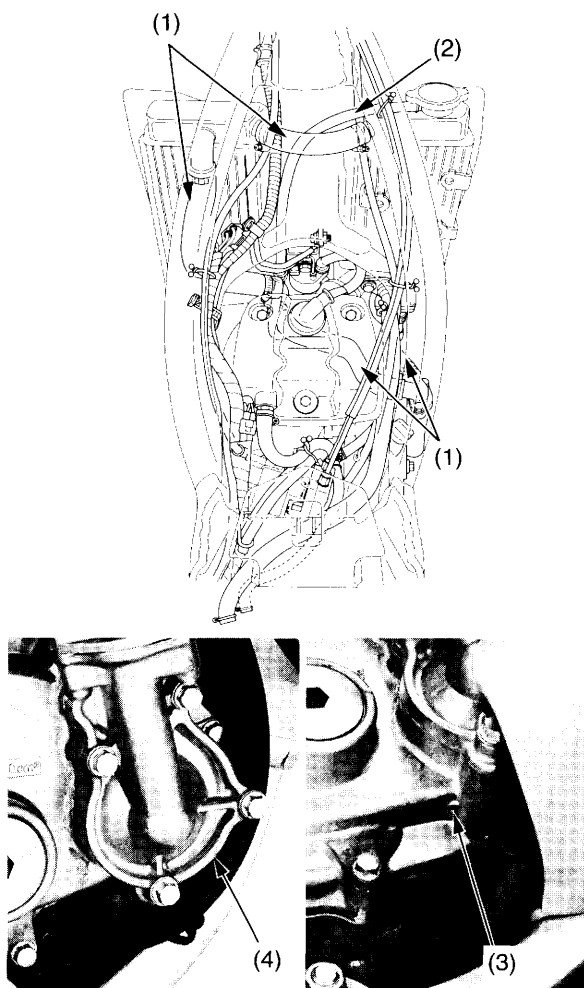

- (1) water hoses
- (2) siphon hose
- (3) bleed hole
- (4) water pump cover

Coolant Replacement

Refer to *Safety Precautions* on page 25.

Coolant should be replaced by your Honda dealer, unless you have the proper tools and service data and are mechanically qualified. Refer to the Honda Service Manual (page 174).

⚠ WARNING

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.

To properly dispose of drained coolant, refer to *You & the Environment*, page 151.

NOTICE

Improper disposal of drained fluids is harmful to the environment.