


# Side Cover Removal

Refer to *Safety Precautions* on page 43 .

LEFT SIDE

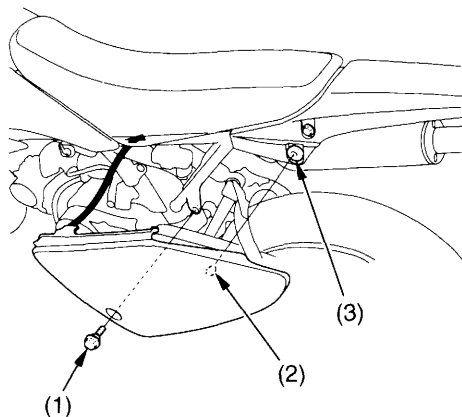

- (1) bolt
- (2) prong
- (3) rubber grommet

## Removal

1. Remove the bolt ( 1 ) securing the side cover.
2. Pull the side cover prong ( 2 ) out of the rubber grommet ( 3 ).

## Installation

1. Attach the side cover on the rear frame.
2. Align the side cover prong with the rubber grommet. Press the side cover into position.
3. Install the securing bolt and tighten it.

Use the same procedure to remove and install the right side cover.