


5. Turn the socket (7) counterclockwise, and remove it.
6. Pull out the bulb (8) without turning.

7. Install a new bulb in the reverse order of removal.
 - Install the metal plate (9) with its arrow mark (10) facing front.

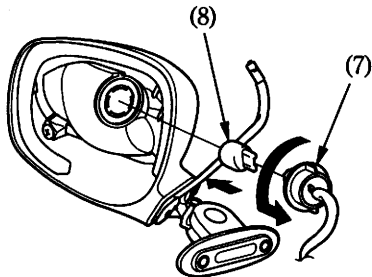

(7) Socket

(8) Bulb