

Transporting Your Honda

Do not tow your ATV behind a car or other vehicle.


When you transport your ATV, we recommend that you carry the vehicle in its normal operating position (on all four wheels) and follow these procedures:

1. Set the parking brake and place the transmission in gear.
2. Turn the fuel valve OFF.
3. Secure the vehicle with “tie-down straps” in the areas shown.

Suitable “tie-down straps” are available from your Honda dealer.

Ordinary rope is not recommended because it can stretch under load.

Using tie-down straps in any other areas can damage your ATV.

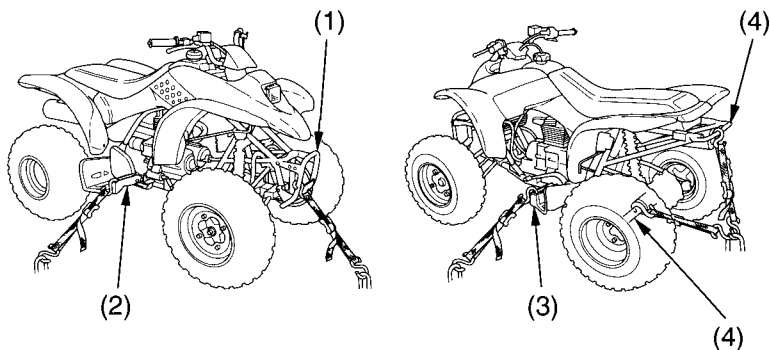

point to secure ATV
with tie-down straps

- (1) front carry pipe
- (2) right footpeg
- (3) left footpeg
- (4) rear carry pipe or
rear axle shaft