Adjusting Idle Speed

NOTE:

Do not try to compensate for faults in other systems by adjusting the carburetor.

To adjust the idle speed:

- Warm up the engine. The engine must be warm for accurate idle adjustment. Ten minutes of stop-and-go riding is sufficient.
- Adjust idle speed by turning the throttle stop screw (Fig. 4-10). Idle Speed:

 $1,400 \pm 100 \text{ rpm}$

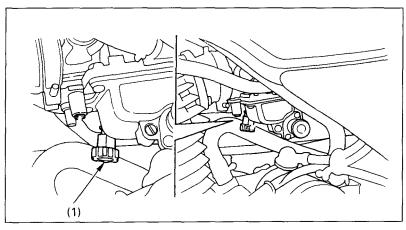


Fig. 4-10

(1) Throttle stop screw