

### Engine Oil Recommendations

Recommended Oil Viscosity: SAE 10W-40. Other viscosities shown in Fig.4-11 may be used when the average temperature in your riding area is within the indicated range.

USE PRO HONDA GN4 4-STROKE OIL OR AN EQUIVALENT.

For Canada:

USE HONDA 4-STROKE OIL OR AN EQUIVALENT.

Do not use oils with graphite or molybdenum additives. They may adversely affect clutch operation.

Use only high detergent, premium quality motor oil certified to meet API Service Classification SF or SG. Motor oils intended for Service SF or SG will show this designation on the container. The use of special oil additives is unnecessary and will only increase operating expenses.

#### NOTE:

- \* Engine oil is a major factor affecting the performance and service life of the engine. Nondetergent, vegetable, or castor based racing oils are not recommended.

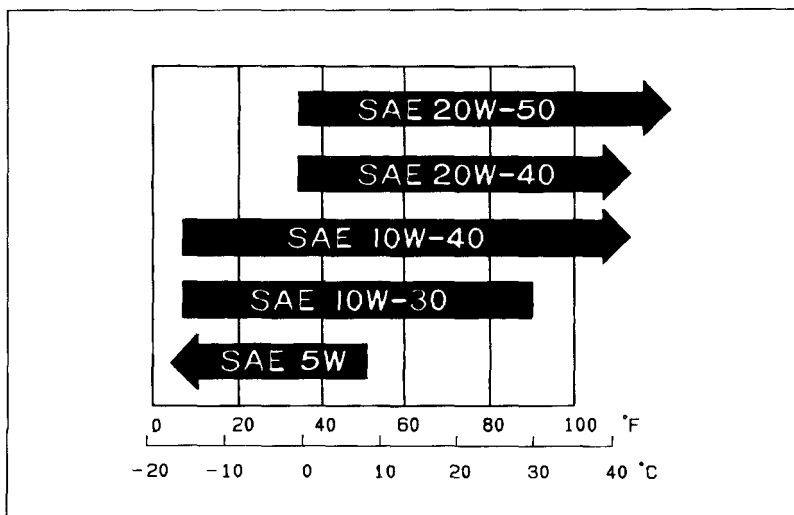


Fig. 4-11

Recommended oil viscosities