

3. Grasp the starter grip and slowly pull it out about four inches (100 mm). Then pull the starter grip briskly to start the engine (Fig. 3-12).
- After the engine starts, slowly return the starter grip.
4. Warm up the engine by opening and closing the throttle slightly.
5. About a half minute after the engine starts, push the choke lever down all the way to fully OFF ( B ).
6. If idling is unstable, open the throttle slightly.

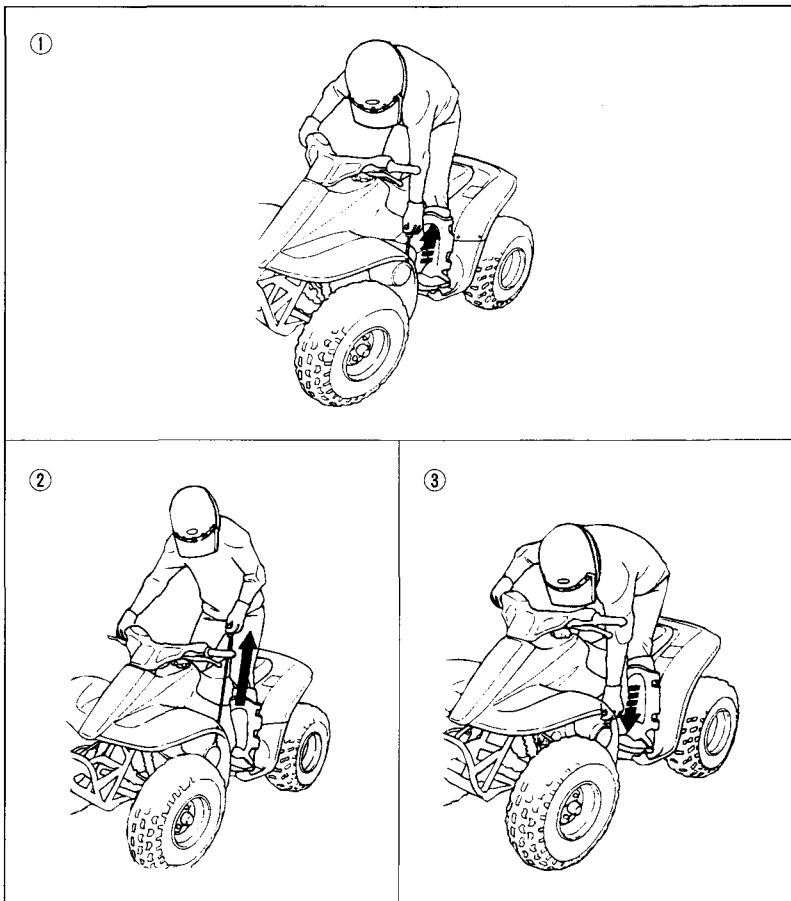


Fig. 3-12