

Adjust the drive chain and tighten the bearing holder mounting bolts.

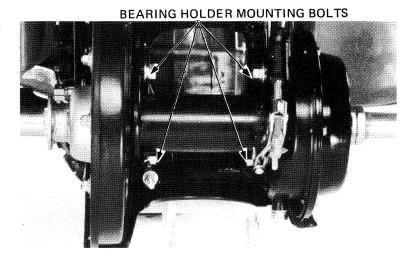

Install the rubber seal onto the drive chain cover. Install the drive chain cover using the five clips and two nuts.

Install the seal plate using the three bolts.

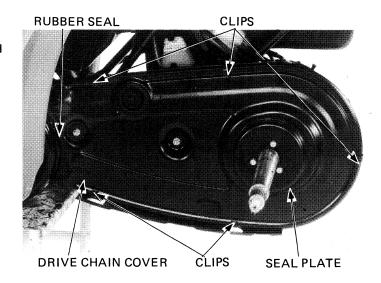

Apply grease to the splines on both end of the axle.

