

REAR BRAKE PEDAL HEIGHT

Check that the distance between the pedal and upper face of the footpeg is:

'85: 20 mm (3/4 in)


AFTER '85: 0 mm (0 in)

CAUTION

Incorrect brake pedal height can cause brake drag.

To adjust height, loosen the lock nut and turn the master cylinder push rod. Tighten the lock nut.

MASTER CYLINDER PUSH ROD

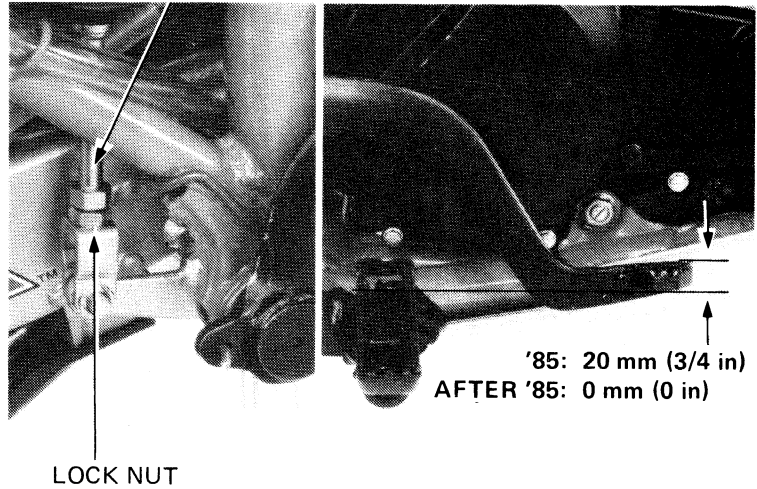

PARKING BRAKE

Disconnect the clutch cable at lower end.


Parking brake adjustment may be required if the parking brake does not hold the rear wheels properly.

Press the parking brake button and pull in the clutch/parking brake lever.

Measure the distance the clutch/parking brake lever is moved.

The distance should be 31–39 mm (1-1/4–1-1/2 in) at the tip of the clutch/parking brake lever.

PARKING BRAKE BUTTON

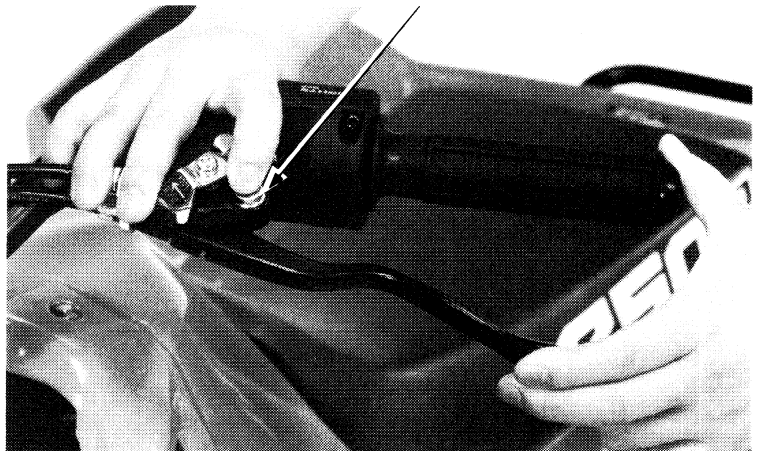

Adjust as follows:

Loosen the lock nut on the rear caliper.

Screw in the adjusting bolt until you feel resistance without applying the clutch/parking brake lever, and tighten the lock nut.

TORQUE: 15–20 N·m (1.5–2.0 kg·m, 11–14 ft·lb)

