



SHOCK ABSORBER

REMOVAL

Raise the rear wheels off the ground by placing a jack or block under the engine.
 Remove the air cleaner case (Page 3-5).
 Remove the lower guard by removing the four bolts.

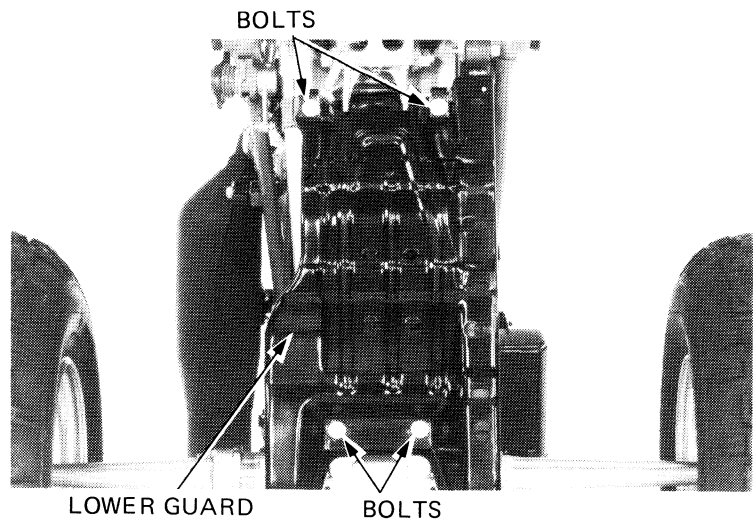

Remove the 8 mm flange bolt and the reservoir from the frame.

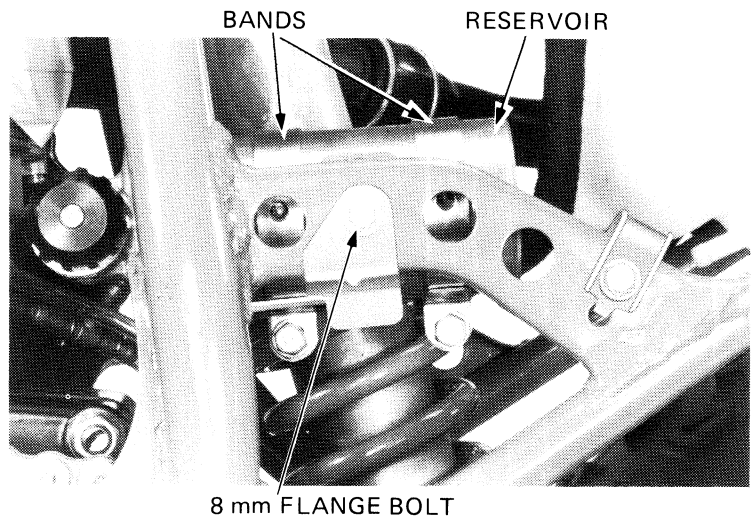

Remove the shock upper and lower mounting bolts and the shock absorber.

