



REAR SUSPENSION

Position the reservoir so that its boss aligns with the hole in the bracket on the frame and secure it with the two reservoir bands as shown.

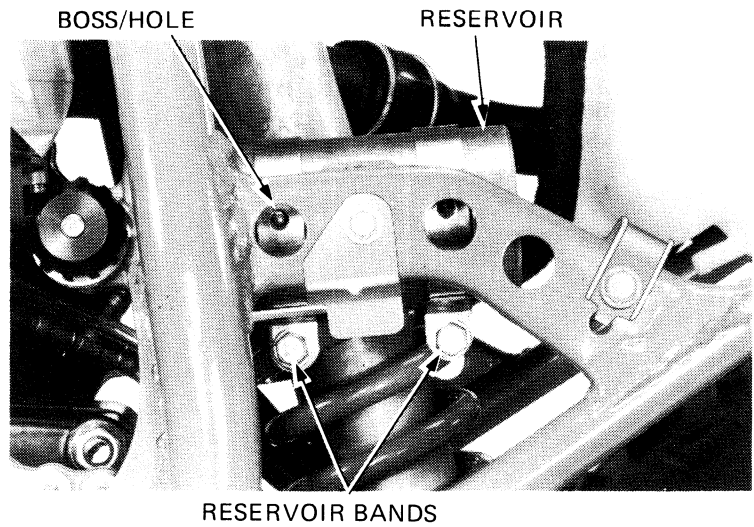

Install the swing arm lower guard with the four bolts.

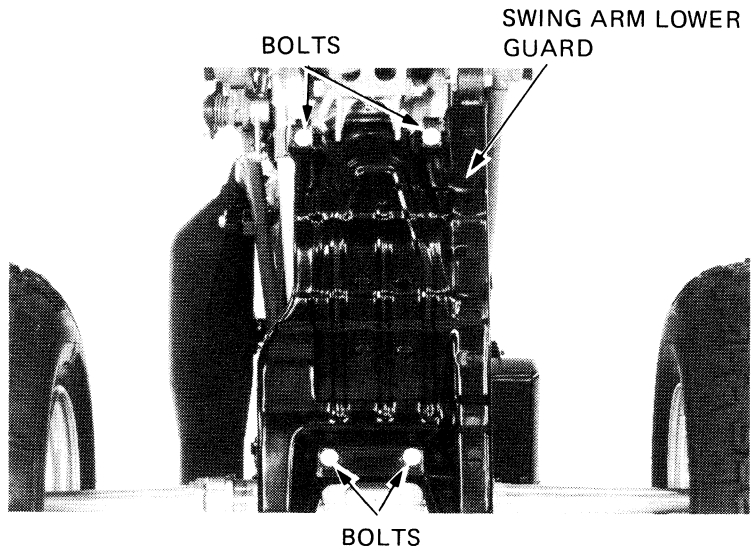

SUSPENSION LINKAGE

REMOVAL

Remove the swing arm lower guard.
Place a jack or block under the engine.
Remove the shock absorber lower mounting bolt.
Remove the shock arm pivot bolt and shock arm from the swing arm.

