


**AFTER '85:**


Remove the following:

- rear wheels and axle (Page 11-3).
- two bolts attaching the brake hose clamps to the swing arm.

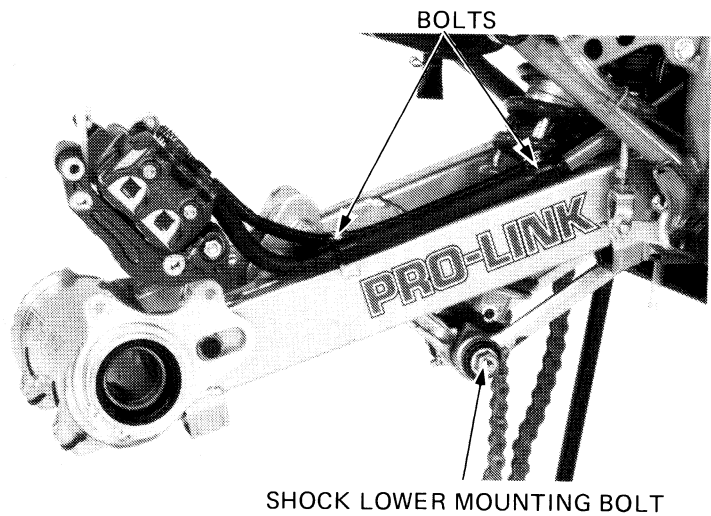

**'85 AND AFTER '85:**

Remove the flange bolt and brake pedal.

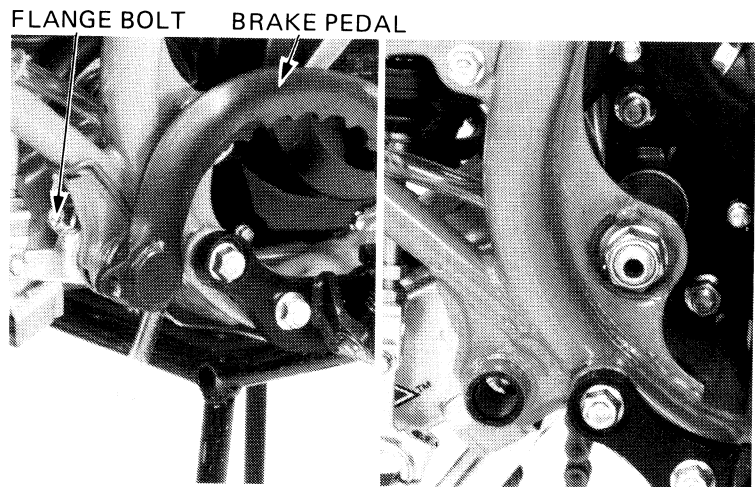

Remove the shock arm pivot bolt and shock arm from the swing arm.

Remove the screw attaching the chain slider set plate and remove the set plate and slider.

Remove the wheel bearing holder (Page 11-9), swing arm pivot dust seals, and pivot collars.

