


REAR FENDER/SEAT/EXHAUST SYSTEM

Install the exhaust chamber mounting springs.

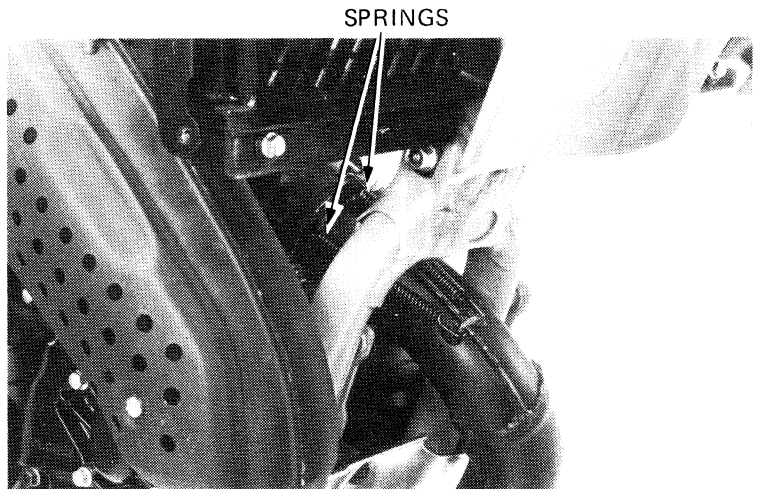

Slide the rubber seal over the joint and secure it with two spring bands.

'85:

Install the chamber mounting bolt and spring.


AFTER '85:

Install the chamber mounting bolt.

'85 AND AFTER '85:

Make sure that there are no exhaust leaks after installation.

Install the fuel tank and rear fender/seat.

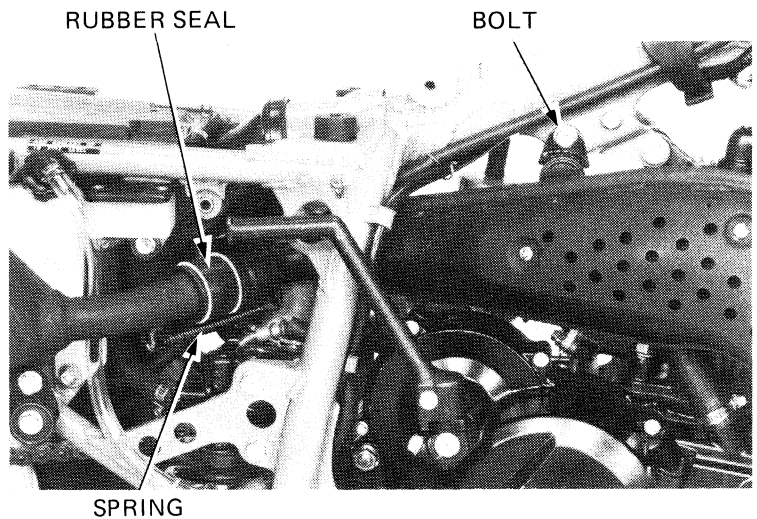

EXHAUST MUFFLER REMOVAL/ INSTALLATION

Remove the rear fender and seat (Page 14-1).

'85:

Remove the muffler mounting bolts, spring and the muffler.

AFTER '85:

Remove the muffler mounting bolts and the muffler.

Install the muffler in the reverse order of removal. Make sure that there are no exhaust leaks after installation.

