


## Front Seat

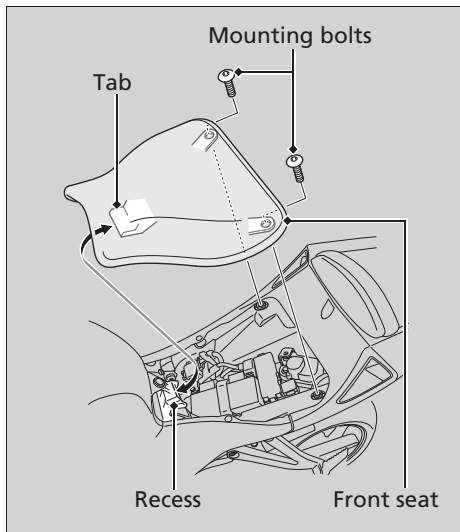

### Removal

1. Pull the rear corners of the front seat up, then remove the mounting bolts.
2. Pull the front seat back and up.

### Installation

1. Insert the tab into the recess.
  2. Install and tighten the mounting bolts securely.
- Make sure that the seat is locked securely in position to pull it up lightly.