


8. Disconnect the positive + terminal from the battery.
9. Remove the battery taking care not to drop the terminal nuts.

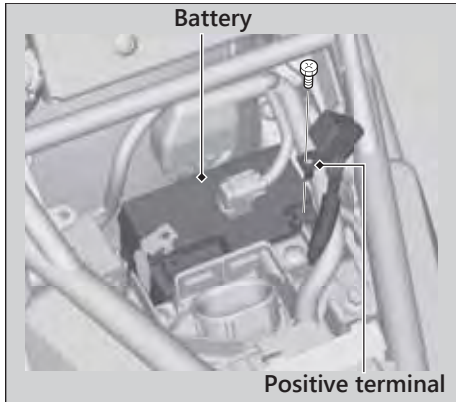

## Installation

Install the parts in the reverse order of removal. Always connect the positive + terminal first. Make sure that bolts and nuts are tight.

Make sure the clock information is correct after the battery is reconnected. 2 P. 24  
For proper handling of the battery, see "Maintenance Fundamentals." 2 P. 51  
"Battery Goes Dead." 2 P. 105