


# Suspension


5. Pour the recommended fork oil into the outer tube (1).

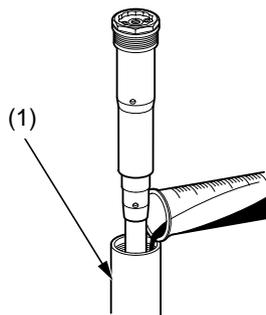

(1) outer tube


## Fork Oil Capacity:

### Standard 25.12 lbf/in (4.4 N/mm) Fork Spring

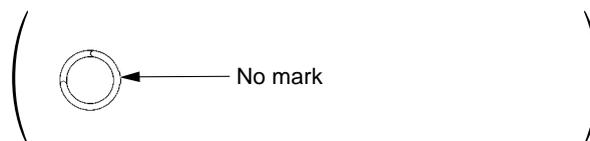


Standard oil capacity	11.6 US oz (342 cm <sup>3</sup> )	
Maximum oil capacity	12.3 US oz (363 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	9.7 US oz (286 cm <sup>3</sup> )	Slightly softer as it nears full compression.

### Optional Softer 23.98 lbf/in (4.2 N/mm) Fork Spring

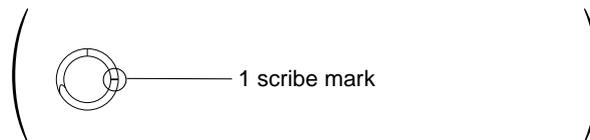

Standard oil capacity	11.7 US oz (347 cm <sup>3</sup> )	
Maximum oil capacity	12.4 US oz (368 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	9.8 US oz (291 cm <sup>3</sup> )	Slightly softer as it nears full compression.

### Optional Stiffer 26.20 lbf/in (4.59 N/mm) Fork Spring

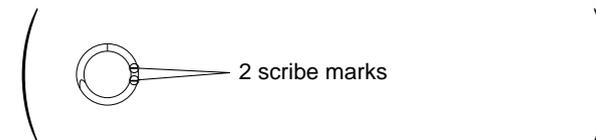

Standard oil capacity	11.7 US oz (345 cm <sup>3</sup> )	
Maximum oil capacity	12.4 US oz (366 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	9.7 US oz (288 cm <sup>3</sup> )	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.

(cont'd)