

# Suspension

18. Install the disc cover (23) and tighten the disc cover socket bolts (24) to the specified torque:  
10 lbf·ft (13 N·m, 1.3 kgf·m)


Left fork:



(23) disc cover (24) disc cover socket bolts

19. Turn the rebound damping (25) and compression damping (26) adjusters back to their original settings.

Right fork:

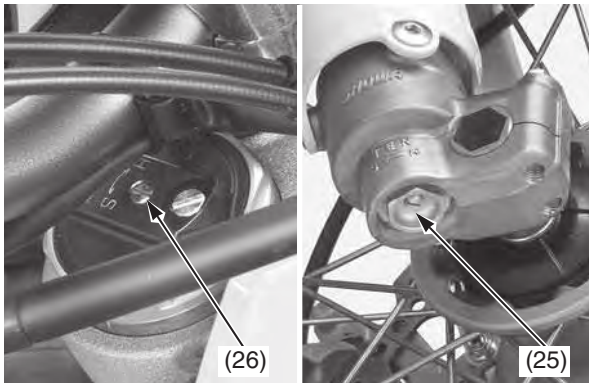

(25) rebound damping adjuster  
(26) compression damping adjuster