



Subframe

14. While holding the license light stay assembly (33), remove the mounting A bolts (34), collars A (35), mounting B bolts (36), collars B (37) and clip (38). Remove the license light stay assembly from the rear fender B (23) while releasing the license light wire from the rear fender B.

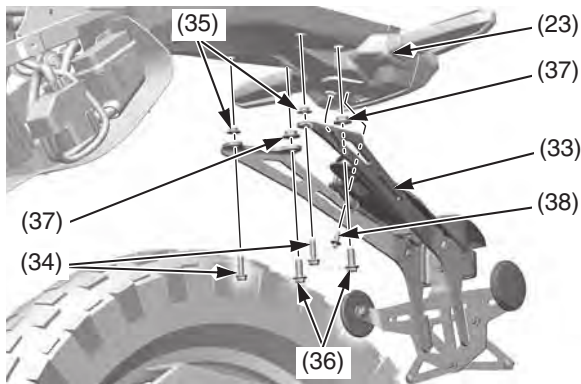


(23) rear fender B
(33) license light stay assembly
(34) mounting A bolts
(35) collars A
(36) mounting B bolts
(37) collars B
(38) clip

15. Remove the rear fender B (23) while releasing the front bosses from the air cleaner housing (17).

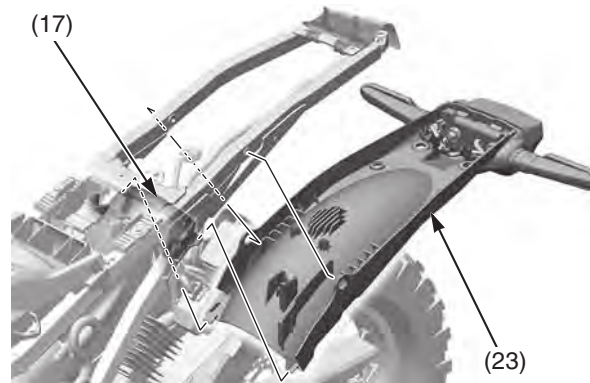


(17) air cleaner housing (23) rear fender B

16. Remove the bolt (39) and turn signal relay/bracket (40) from the subframe (13).

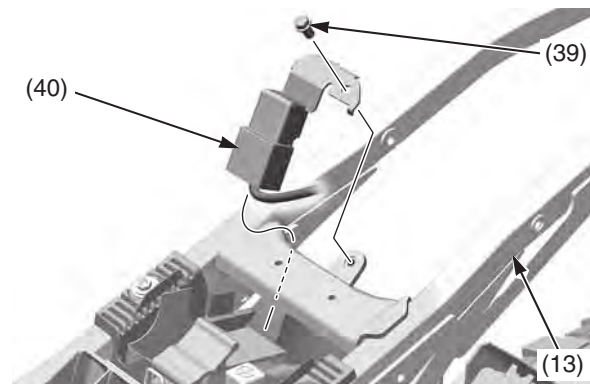


(13) subframe
(39) bolt
(40) turn signal relay/bracket

17. Remove the positive (+) battery cable bands (41), then release the positive (+) battery cable (42) from the subframe (13).

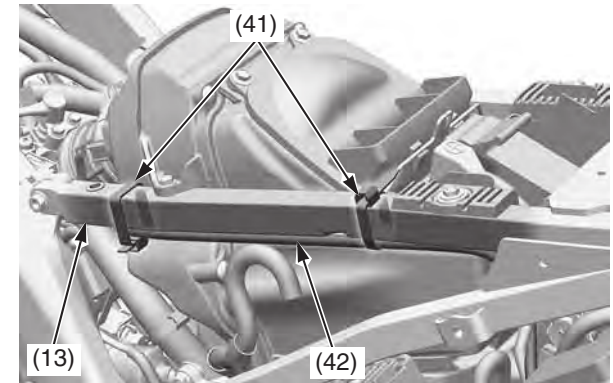

(13) sub frame
(41) cable bands
(42) positive (+) battery cable

18. Remove the fuse box assembly mounting bolt/washer (43). Remove the regulator/rectifier mounting bolts (44).

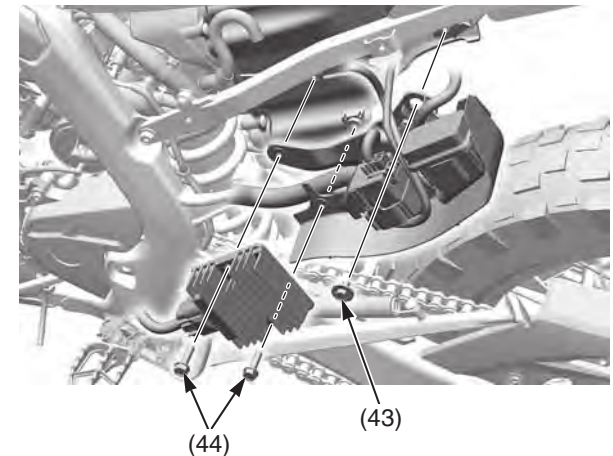

(43) fuse box assembly mounting bolt/washer
(44) regulator/rectifier mounting bolts