


## Torque Specifications

### Frame

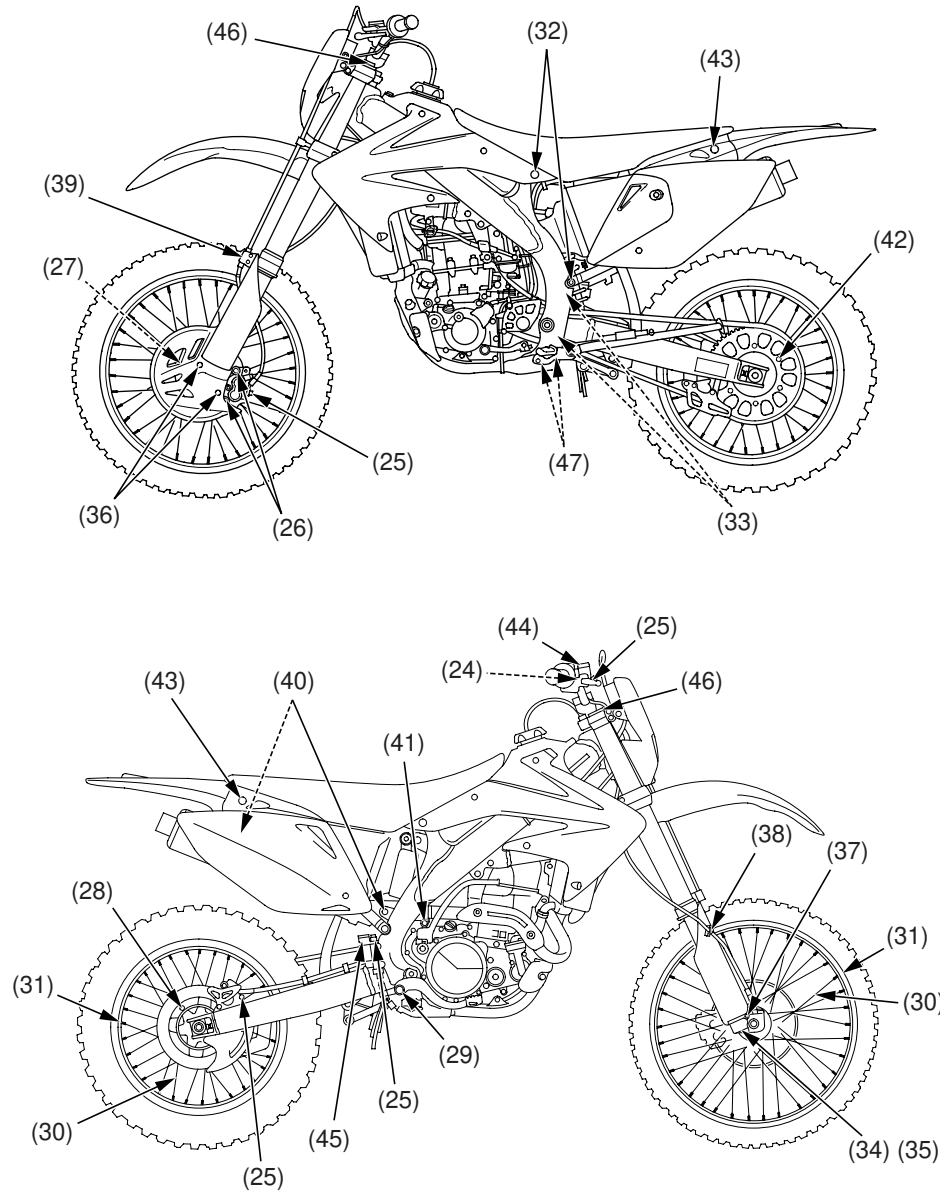

Item	Torque			Remarks	
	N·m	kgf·m	lbf·ft		
<b>FRAME</b>					
24	Front brake master cylinder holder bolts	9.9	1.0	7.3	
25	Brake hose bolts	34	3.5	25	
26	Caliper mounting bolts	30	3.1	22	NOTE 4
27	Front brake disc nuts	16	1.6	12	NOTE 2
28	Rear brake disc nuts	16	1.6	12	NOTE 2
29	Brake pedal pivot bolt	36	3.7	27	
30	Spokes (front)	3.68	0.4	2.7	
	(rear)	3.7	0.4	2.7	
31	Rim locks	12	1.2	9	
32	Subframe bolts (upper)	30	3.1	22	
	(lower)	49	5.0	36	
33	Drive chain roller (upper)	12	1.2	9	NOTE 3
	(lower)	12	1.2	9	NOTE 2
34	Fork centre bolt	69	7.0	51	
35	Fork centre lock nut	22	2.2	16	
36	Disc cover bolts	13	1.3	10	
37	Fork protector bolts	7	0.7	5.2	NOTE 4
38	Tripmeter cable guide screws	0.7	0.1	0.5	
39	Front brake hose guide bolts	5.2	0.5	3.8	
40	Muffler mounting bolts (front)	26	2.7	19	
	(rear)	26	2.7	19	
41	Muffler clamp bolt	21	2.1	15	
42	Driven sprocket nuts	32	3.3	24	NOTE 2
43	Seat bolts	26	2.7	19	
44	Front brake reservoir cap screws	1	0.1	0.7	
45	Rear brake reservoir cap bolts	1	0.1	0.7	
46	Fork air pressure release screw	1.2	0.1	0.9	
47	Left step bracket mounting bolts (upper)	55	5.6	41	
	(lower)	30	3.1	22	

- NOTES:
1. Apply oil to the threads and flange surfaces.
  2. U-nut.
  3. SH bolt.
  4. Apply locking agent to the threads.