


4. Install a new bulb and parts in the reverse order of removal.
- Install the socket by aligning its "△" mark with the round projection on the turn signal light lens. Then turn it clockwise until the "△" mark is aligned with the triangular projection.
 - Use only the amber bulb.

Position Light Bulb

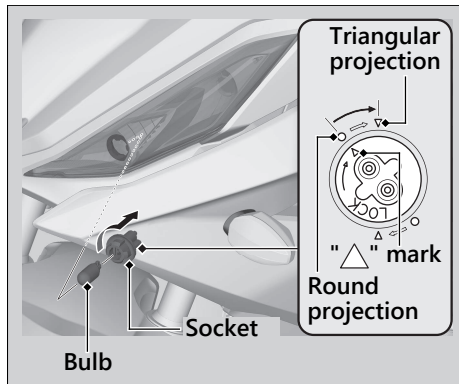

1. Turn the socket counterclockwise and pull it out.
2. Pull the bulb out without turning it.