


**CARGO LIMIT**

2.0kg / 4.5lbs

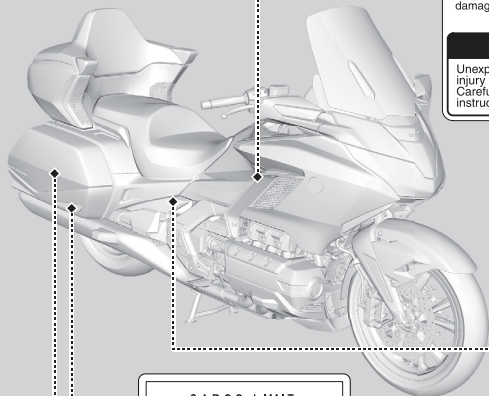

**CARGO LIMIT**

9.0kg / 20.0lbs

**GL1800DA**

**[EQUIPPED WITH AIRBAGS]**

All airbag system wires/connectors are yellow. Disconnecting, tampering with, or using test equipment on any yellow wires or connectors can cause system damage or accidental deployment.

**▲ WARNING**

Unexpected deployment could cause serious injury to you or others. Carefully follow the Service Manual instructions.


**GL1800/D**

**Cargo Limit**

3.0kg / 6.6lbs

**CARGO LIMIT**

9.0kg / 20.0lbs

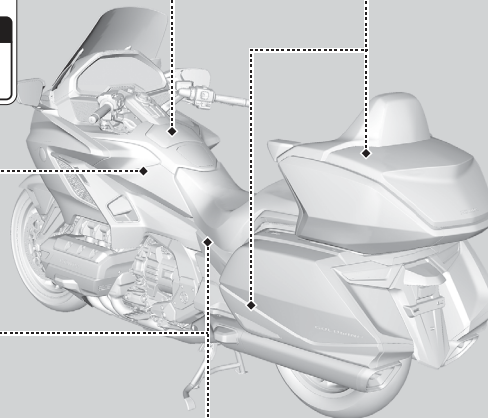

**GL1800/D**

**TIRE INFORMATION**

Cold tire pressures		kPa	kgf/cm <sup>2</sup>	psi
Up to maximum weight capacity	Front	250	2.50	36
	Rear	280	2.80	41
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	280	2.80	41
Tire size	Front	180V1818M(C) 55H		
	Rear	200V55R18M(C) 77H		
Min. recommend	Front	1.5mm(0.06in.)		
tire center tread depth,	Rear	2.0mm(0.08in.)		
Maximum weight capacity		192kg(423lbs)		

Read owner's manual.

**GL1800DA**

**TIRE INFORMATION**

Cold tire pressures		kPa	kgf/cm <sup>2</sup>	psi
Up to maximum weight capacity	Front	250	2.50	36
	Rear	280	2.80	41
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	280	2.80	41
Tire size	Front	180V1818M(C) 55H		
	Rear	200V55R18M(C) 77H		
Min. recommend	Front	1.5mm(0.06in.)		
tire center tread depth,	Rear	2.0mm(0.08in.)		
Maximum weight capacity		189kg(417lbs)		

Read owner's manual.

**GL1800DA**

**▲ WARNING**

Airbag system wires and connectors are yellow. Tampering with, cutting, splicing, or disconnecting yellow wires/connectors could cause airbag deployment or a system failure resulting in serious injury or death.