


### Inspecting the depth of the tread

Inspect the tread wear. For safe riding, the tyres should be replaced when the tread reaches a minimum depth of 3.0 mm.

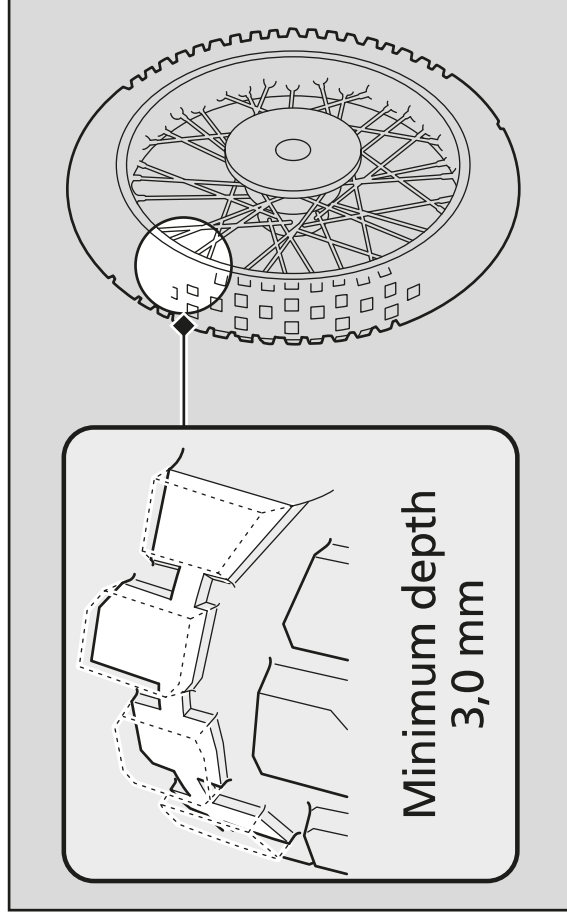

## ⚠ WARNING

Riding with tyres that are excessively worn or incorrectly inflated may cause an accident in which you could suffer serious injuries or even be killed.

Follow all instructions in this owner's manual regarding tyre inflation and maintenance.