


	C50	C50M	C65, C65M	S65	S50
Steering handle width	632 mm (24.9 in.)	632 mm (24.9 in.)	632 mm (24.9 in.)	605 mm (23.79 in.)	605 mm (23.79 in.)
Caster	63°	63°	63°	63°	63°
Trail	75 mm (2.95 in.)	75 mm (2.95 in.)	75 mm (2.95 in.)	75 mm (2.95 in.)	75 mm (2.95 in.)
Tire, front	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)
Tire, rear	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)	2.25-17 (4PR)
Brake system	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe
Type brake, front	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe	Internal expanding shoe
Type brake, rear	Right hand lever operated	Right hand lever operated	Right hand lever operated	Right hand lever operated	Right hand lever operated
Method of application, front	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated
Method of application, rear	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated	Right foot pedal operated
Suspension system	Bottom link system	Bottom link system	Bottom link system	Bottom link system	Bottom link system
Suspension method, front	Swing arm type	Swing arm type	Swing arm type	Swing arm type	Swing arm type
Suspension method, rear	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Dampening system, front	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Dampening system, rear	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Frame type	Backbone type	Backbone type	Backbone type	Backbone type	Backbone type
Lighting system	ASS11	ASS11	ASS11	ASS11	ASS11
Headlamp type	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki
Manufacturer	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki
Headlamp rating	6V-15W/15W	6V-25W/25W	6V-15W/15W [6V-25W/25W]	9V-15W/15W	6V-15W/15W
Taillamp rating	6V-3W	6V-3W	6V-3W	6V-2W	6V-2W
Taillamp combination with color	License plate	License plate	License plate	License plate	License plate
Stop lamp rating, color	6V-10W red	6V-10W red	6V-10W red	6V-6W red	6V-6W red
Stop lamp combination with color	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element
Turn signal type	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element	Magnetic, heating element
Turn signal rating, color	6V-8W X2 amber	6V-8W X2 amber	6V-8W X2 amber	6V-8W X2 amber	6V-8W X2 amber
Turn signal combination with color	6V-1.5W	6V-1.5W	6V-1.5W	6V-1.5W	6V-1.5W
Instrument	Electric flat type	Electric flat type	Electric flat type	Electric flat type	Electric flat type
Horn type	Imasen Denki, Mitsuba Denki	Imasen Denki, Mitsuba Denki	Imasen Denki, Mitsuba Denki	Imasen Denki, Mitsuba Denki	Imasen Denki, Mitsuba Denki
Manufacturer	Magnetically driven	Magnetically driven	Magnetically driven	Magnetically driven	Magnetically driven
Speedometer type	Nippon Seiki, Nippon Denso	Nippon Seiki, Nippon Denso	Nippon Seiki, Nippon Denso	Nippon Seiki, Nippon Denso	Nippon Seiki, Nippon Denso
Manufacturer	Magnetically driven	Magnetically driven	Magnetically driven	Magnetically driven	Magnetically driven
Rear view mirror, type	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki	Stanley Denki
Manufacturer	Same as left	Same as left	Same as left	Same as left	Same as left
Method of installation	Same as left	Same as left	Same as left	Same as left	Same as left

Engine Performance (C 50)



Running Performance (C 50)

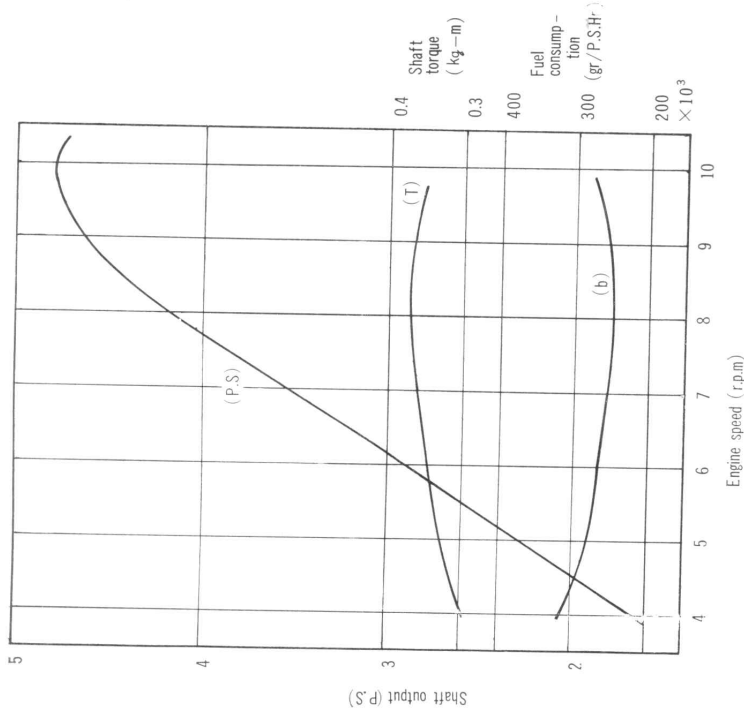