




Install the left handlebar switch mounting screws.
Apply grease to the throttle grip sliding surface.
Connect the throttle cable end to the throttle grip.



Align the right handlebar switch tang with the handlebar recess and install the switch.

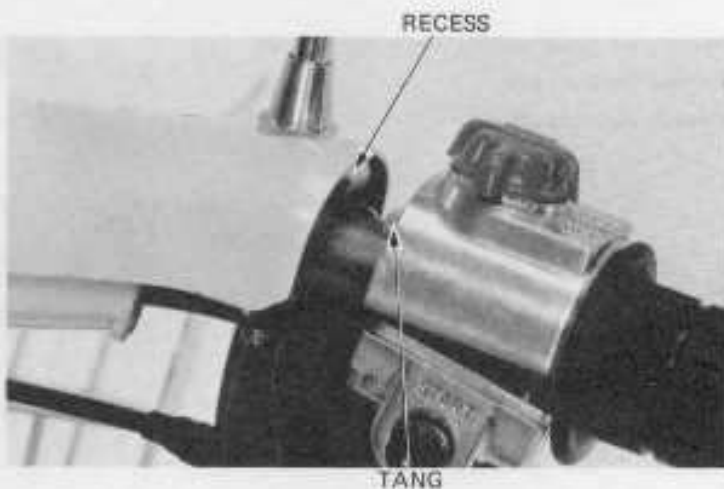

Install the headlight (page 12-3) and connect the speedometer wires.
Adjust throttle cable free play (page 3-3).

