

5. REAR SHOCK ABSORBER (REAR CUSHION)

Spring free length: 173.5 mm (6.831 in.)

Installed length/Load:

159.1 mm/19.3 kg (6.264 in./42.55 lbs.)

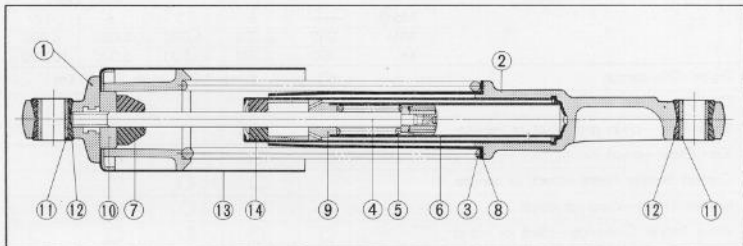


Fig. K1.5

- | | | |
|------------------------------------|----------------|-------------------------|
| ① Rear shock absorber upper metal | ⑥ Inner pipe | ⑪ Rubber bushing collar |
| ② Rear shock absorber bottom metal | ⑦ Rubber stop | ⑫ Rubber bushing |
| ③ Rear shock absorber spring | ⑧ Spring guide | ⑬ Upper case |
| ④ Rear shock absorber rod | ⑨ Rod guide | ⑭ Oil seal |
| ⑤ Rebound stop spring | ⑩ Lock nut | |

6. WHEEL AXLE NUT

The front and wheel axle nuts were changed to a castle nut that is fixed by a cotter pin.

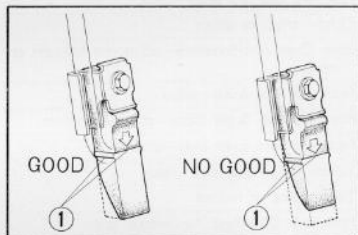


Fig. K1.6 ① Wheel axle nut ② Cotter pin