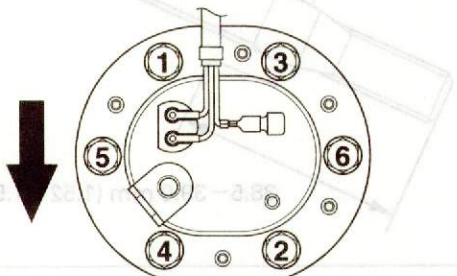


GENERAL INFORMATION

FRAME	ITEM	Q'TY	THREAD DIA. (mm)	TORQUE N·m (kgf·m, lbf·ft)	REMARKS
FRAME BODY PANELS/EXHAUST SYSTEM:					
	Side stand pivot bolt	1	10	10 (1.0 , 7)	
	Side stand pivot lock nut	1	10	29 (3.0 , 22)	
	Main stand mounting bolt	1	10	54 (5.5 , 40)	NOTE 8
	Main stand spring hook	1	8	26 (2.7 , 20)	
	Bank sensor	2	8	22 (2.2 , 16)	
	Exhaust pipe joint nut	8	7	21 (2.1 , 15)	
	Muffler band bolt	4	8	18 (1.8 , 13)	
	Muffler bracket bolt	2	8	26 (2.7 , 20)	
	Seat rail mounting bolt	4	10	44 (4.5 , 33)	
FUEL SYSTEM (Programmed Fuel Injection):					
	Fuel tube sealing nut (throttle body side)	1	12	22 (2.2 , 16)	
	Fuel tube banjo bolt (fuel tank side)	1	12	22 (2.2 , 16)	
	Service check bolt	1	6	15 (1.5 , 11)	
	Fuel pump mounting nut	6	6	12 (1.2 , 9)	
					
	Fuel filler cap bolt	3	4	2 (0.2 , 1.4)	
	O ₂ sensor	1	12	25 (2.5 , 18)	
	Bank angle sensor mounting screw	2	4	2 (0.2 , 1.4)	
COOLING SYSTEM:					
	Cooling fan nut	1	5	3 (0.27 , 2.0)	
	Fan motor nut	3	6	5 (0.5 , 3.6)	
ENGINE MOUNTING:					
	Side stand bracket bolt	2	10	54 (5.5 , 40)	
	Engine hanger nut (rear/upper)	1	12	64 (6.5 , 47)	
	Engine hanger nut (rear/lower)	1	12	64 (6.5 , 47)	
	Engine hanger bolt	3	10	40 (4.1 , 30)	
	Engine hanger adjusting bolt	2	22	11 (1.1 , 8)	
	Engine hanger adjusting bolt lock nut	2	22	54 (5.5 , 40)	
CLUTCH/GEARSHIFT LINKAGE:					
	Gearshift pedal bolt	1	6	10 (1.0 , 7)	
FRONT WHEEL/SUSPENSION/STEERING:					
	Handlebar stopper bolt	2	8	25 (2.6 , 19)	
	Handlebar weight mounting screw	2	6	10 (1.0 , 7)	
	Steering stem nut	1	24	103 (10.5 , 76)	NOTE 8 See page 13-33
	Top thread A	1	26	26 (2.7 , 20)	
	Top thread B	1	26		
	Fork top bridge pinch bolt	2	8	23 (2.3 , 17)	
	Fork bottom bridge pinch bolt	2	10	49 (5.0 , 36)	
	Front axle bolt	1	14	59 (6.0 , 43)	
	Front axle holder bolt	4	8	22 (2.2 , 16)	
	Front brake disc mounting bolt	12	6	20 (2.0 , 14)	NOTE 8
	Fork cap	2	37	23 (2.3 , 17)	
	Fork socket bolt	2	8	20 (2.0 , 14)	NOTE 2
	Fork damper lock nut	2	10	20 (2.0 , 14)	