


## COOLING SYSTEM

Remove the radiator grill (page 2-4).

Check the radiator air passages for clogging or damage.


Straighten bend fins, and remove insects, mud or other obstructions with compressed air or low water pressure.

Replace the radiator if the air flow is restricted over more than 20 % of the radiating surface.

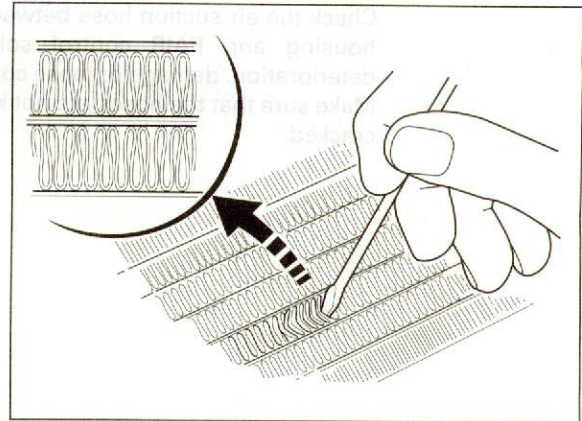

Inspect the radiator hoses for cracks or deterioration, and replace if necessary.

Check the tightness of all hose clamps and fasteners.

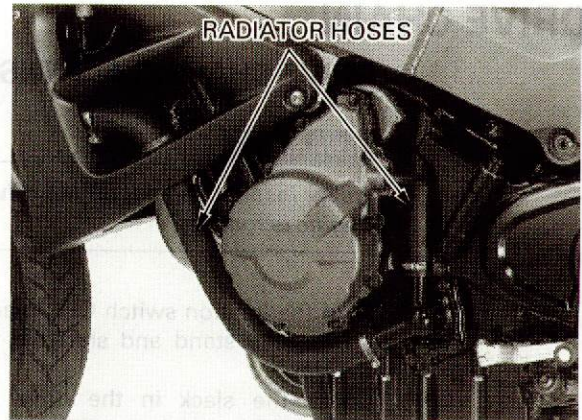

## SECONDARY AIR SUPPLY SYSTEM

**NOTE:**

- This model is equipped built-in secondary air supply system. The pulse secondary air supply system is located on the cylinder head cover.
- The secondary air supply system introduces filtered air into exhaust gases in the exhaust port. The secondary air is drawn into the exhaust port whenever there is negative pressure pulse in the exhaust system. This charged secondary air promotes burning of the unburned exhaust gases and changes a considerable amount of hydrocarbons and carbon monoxide into relatively harmless carbon dioxide and water.

Check the PAIR (pulse secondary air injection) tubes between the PAIR control solenoid valve and cylinder head cover for deterioration, damage or loose connections. Make sure that the hoses are not cracked.

**NOTE:**

If the hoses show any signs of heat damage, inspect the PAIR check valve in the PAIR reed valve cover for damage.

