



FRONT WHEEL/SUSPENSION/STEERING


Install the handlebar weight and tighten the screw securely.

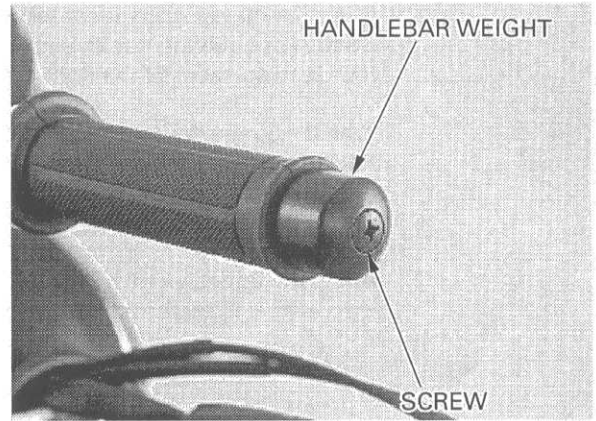

Apply grease to the throttle pipe sliding surface, then install the throttle pipe onto the handlebar.

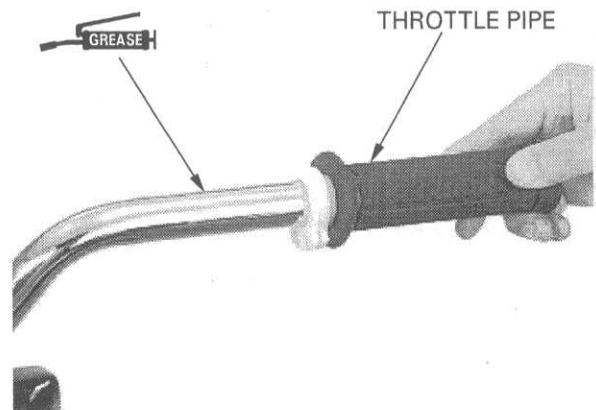

Connect the throttle cables to the throttle grip flange. Install the right handlebar switch/throttle housing aligning its locating pin with the hole in the handlebar.

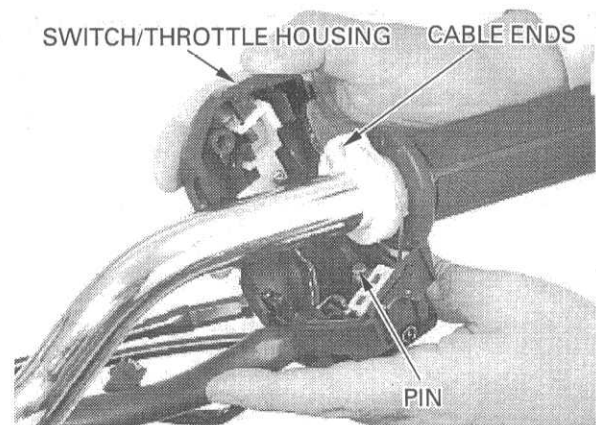

Tighten the forward screw first, then the rear screw.

