


Rear Master Cylinder Removal/Installation

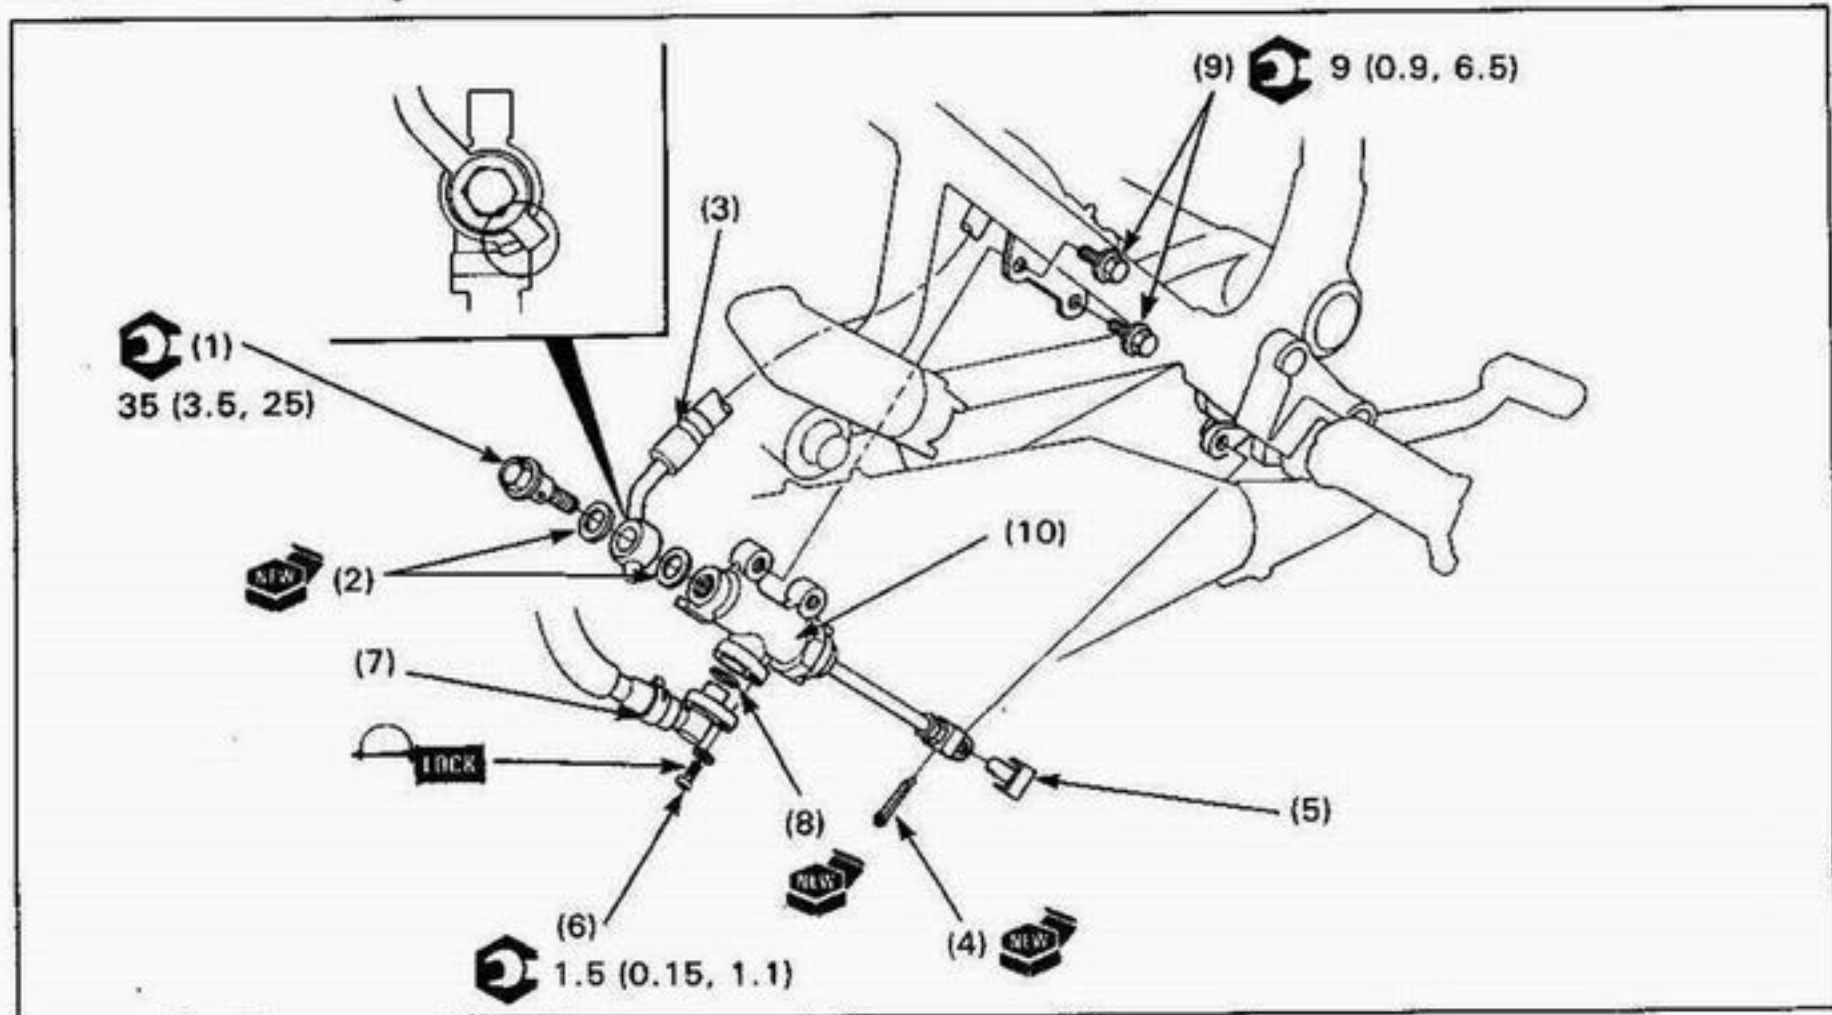

CAUTION

• Spilled brake fluid will damage painted, plastic or rubber parts. Cover these parts when servicing the brake system.

Requisite Service

- Brake fluid replacement/air bleeding (section 17 of the Common Service Manual)

Procedure	Q'ty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Brake hose bolt	1	
(2) Sealing washer	2	
(3) Brake hose	1	
(4) Cotter pin	1	
(5) Joint pin	1	
(6) Screw	1	
(7) Reservoir hose joint	1	
(8) O-ring	1	
(9) Rear master cylinder mounting bolt	2	
(10) Rear master cylinder assembly	1	