

1. Carburetor Setting:

Item	CB750F
Setting mark	CB750F
Venturi dia.	28 ϕ mm
Main jet	105
Air jet	120
Slow jet	40
Air screw opening	1 \pm 3/8
Cutaway	2.5
Valve seat dia.	2.0mm
Fuel level	26mm
Jet needle setting	Third notch

MUFFLER

Disassembly

1. Remove the two bolts ① securing the muffler in position.
2. Remove the eight joint nuts and take out the exhaust pipe joint, joint collar and muffler as an assembled unit.
3. Loosen off the muffler band clamp bolt; remove the two exhaust pipes and sealing gaskets off the muffler.

Inspection

1. Check the muffler for damage or other defects.
2. Check the exhaust pipe gasket for condition.
3. Examine if the muffler sealing gasket is in good condition and is not damaged or broken.

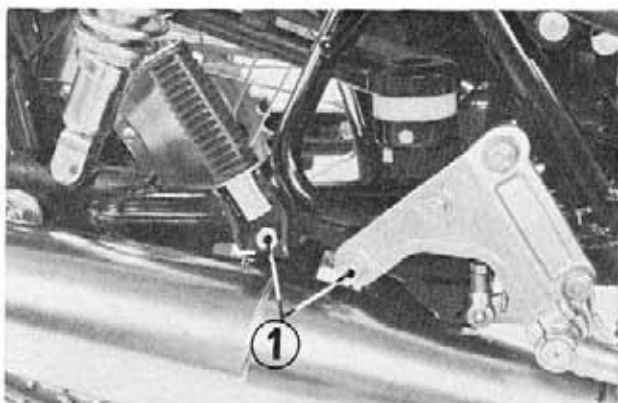


Fig. 1 ①

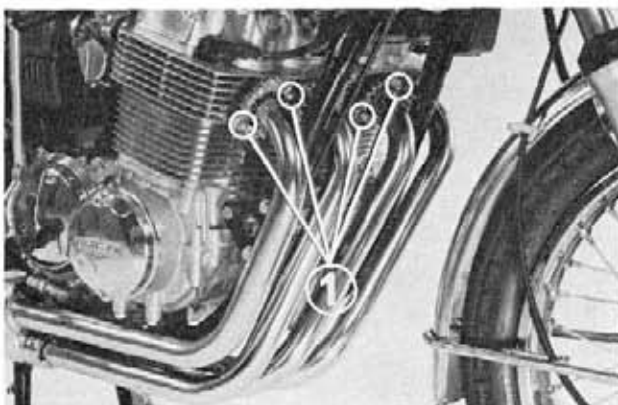


Fig. 2 ① Joint nuts