


FRAME/BODY PANELS/EXHAUST SYSTEM

Be careful not to let the collars fall into the frame.

Install the top shelter onto the fuel tank.

Align the fuel filler hole flange on the top shelter with the rubber on the fuel fill cap.

Install and tighten the special screws and mounting screws/washers.

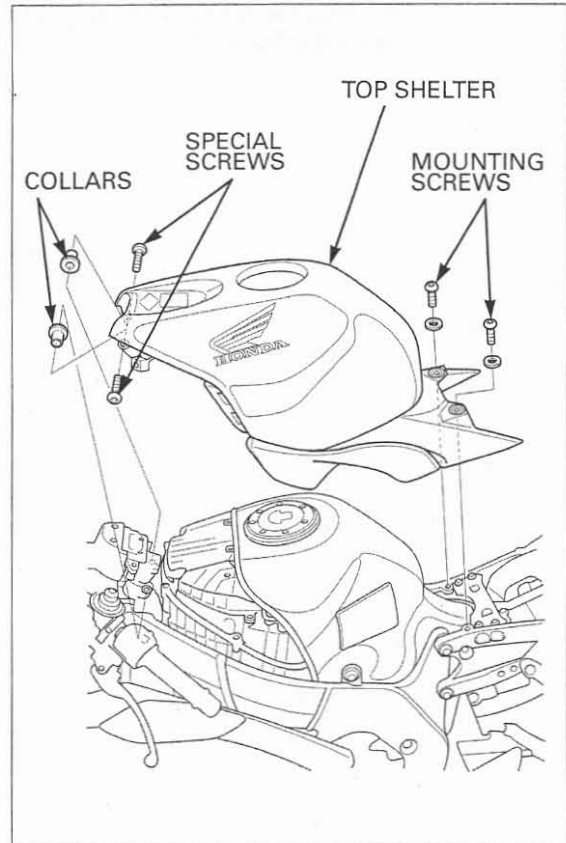

Install the front side cover while aligning its tabs with the grooves in the top shelter.

Install and tighten the special screw on both sides.

Install the rider seat (page 3-4).

