




Loosen the muffler band flange bolt.

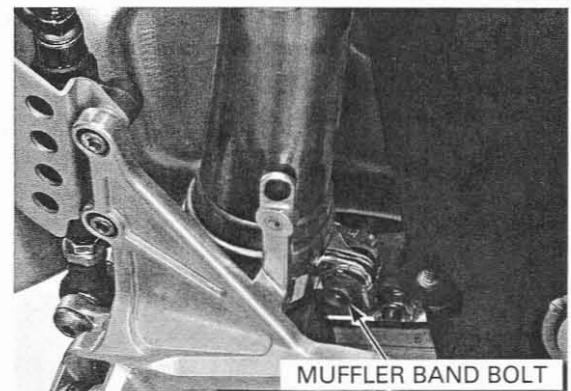

Remove the exhaust pipe joint nuts.

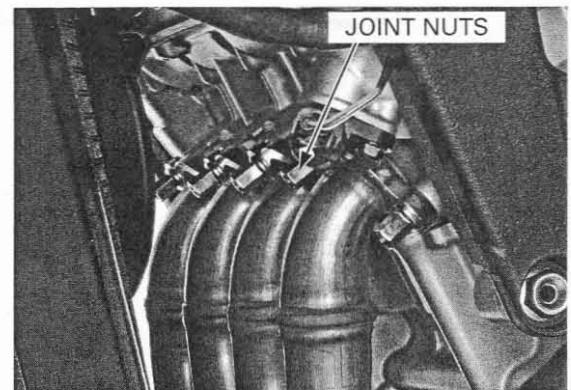

Remove the exhaust pipe mounting bolt/washer, then remove the exhaust pipe.

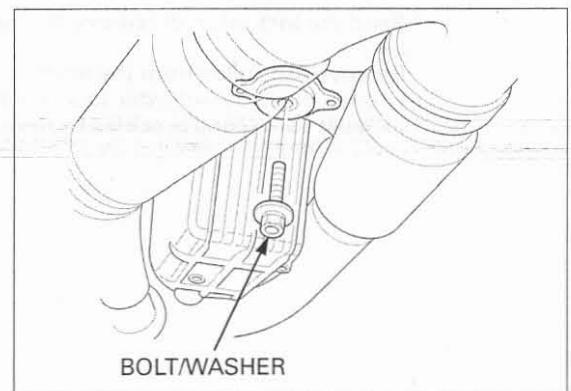

Remove the bolt and exhaust joint pipe clamp.
Remove the exhaust joint pipe, gasket and flange.

