



FRAME/BODY PANELS/EXHAUST SYSTEM

Remove the socket bolts and right footpeg bracket.

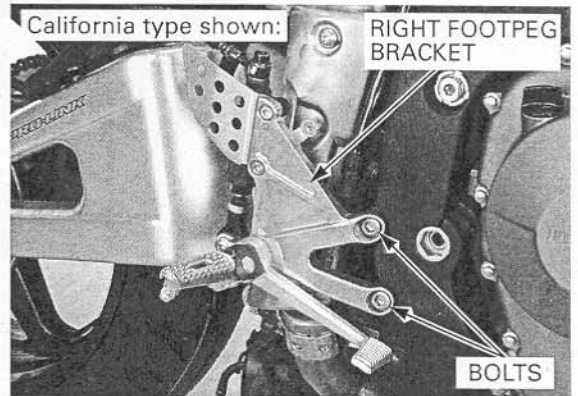


Disconnect the turn signal light and license light connectors.

Remove the four bolts and rear fender B.

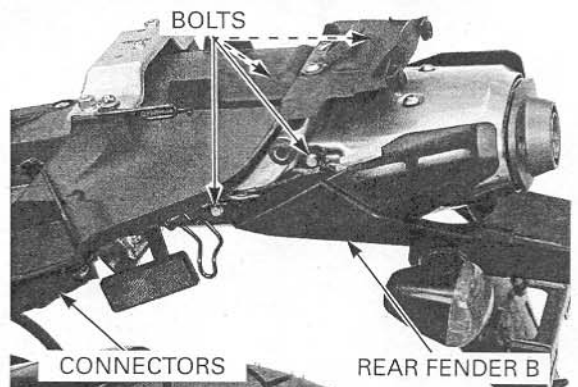

Loosen the muffler band flange bolts.

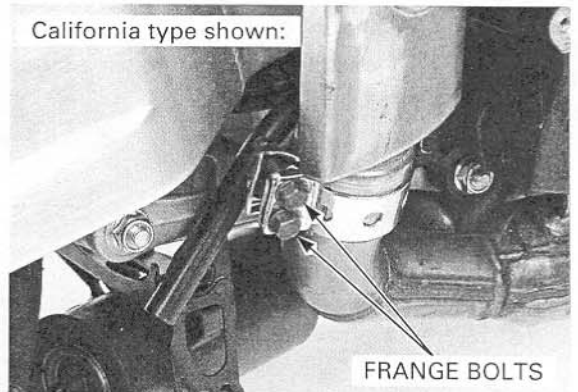

Remove the muffler mounting bolt and washer.

Remove the muffler clamp bolt and nut.

Remove the muffler from the exhaust pipe.

