


FRAME/BODY PANELS/EXHAUST SYSTEM

Install the muffler guard, washer and two bolts.

Install the following:

- Rear cowl (page 3-5)
- Lower cowls (page 3-6)

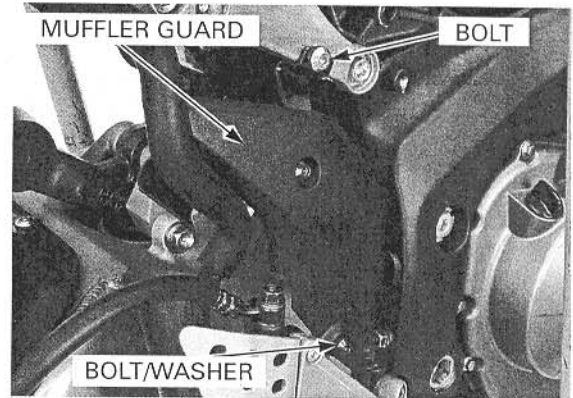



EXHAUST PIPE

REMOVAL

Remove the following:

- Lower cowls (page 3-6)
- Middle cowls (page 3-7)

California type only: Disconnect the O₂ sensor 4P (Natural) connectors.

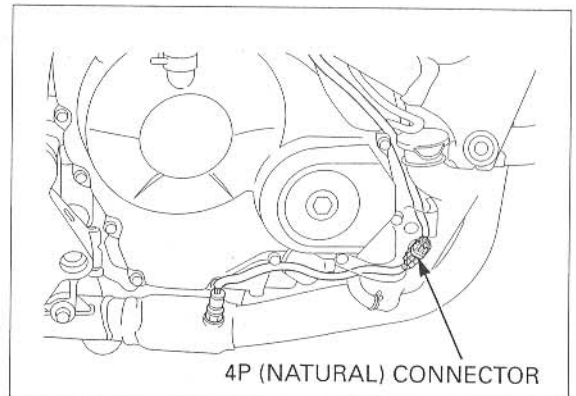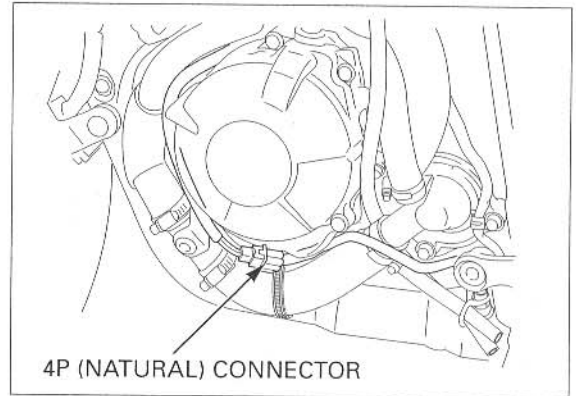

Loosen the muffler band flange bolts.

