



FRONT WHEEL/SUSPENSION/STEERING

Tighten the clutch lever bracket pinch bolt, aligning the punch mark on the left handlebar and clutch lever bracket.


Connect the clutch switch connector.

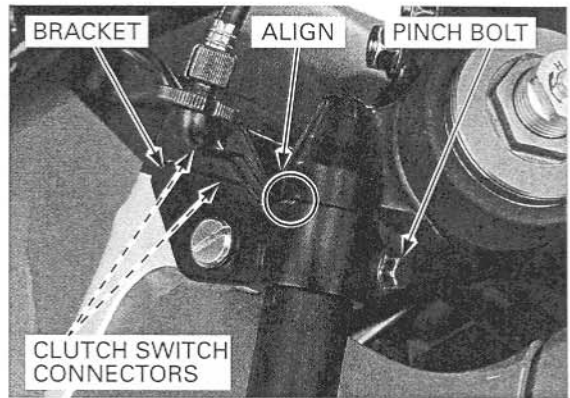

Install the left handlebar switch housing aligning its locating pin with the hole in the handlebar.

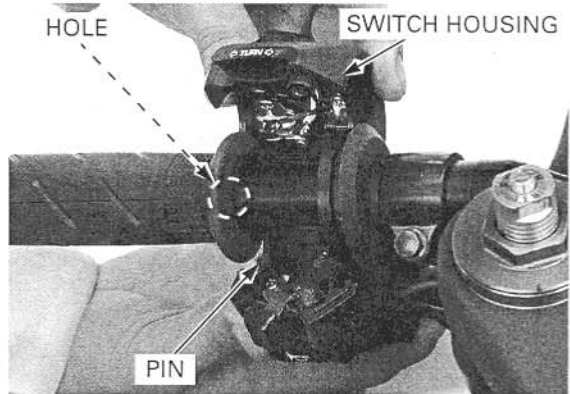

Tighten the forward screw first, then the rear screw.

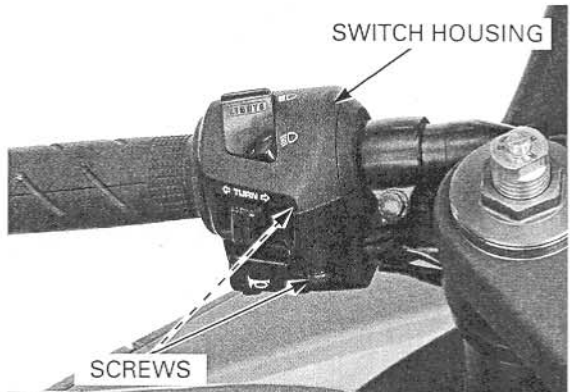

Connect the throttle cables into the throttle pipe.

Install the right handlebar switch/throttle housing by aligning its locating pin with the hole in the handlebar.

